

VOR/DME GGW
113.9
Chan **86**

APP CRS
133°

Rwy Idg
TDZE **2294**
Apt Elev **2296**


VOR RWY 12

WOKAL FLD/GLASGOW-VALLEY COUNTY (GGW)

When local altimeter setting not received, use Wolf Point altimeter setting and increase all MDAs 160 feet and increase S-12 and Circling visibility Cats B/D ¼ SM, Cat C ½ SM and WOKAL fix minimums increase all MDAs 160 feet and increase visibility S-12 Cats C/D ½ SM, and Circling Cat C ¼ SM, Cat D ½ SM.

MISSED APPROACH:
Climb to 4100 in GGW
VOR/DME holding pattern.

ASOS 135.175	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

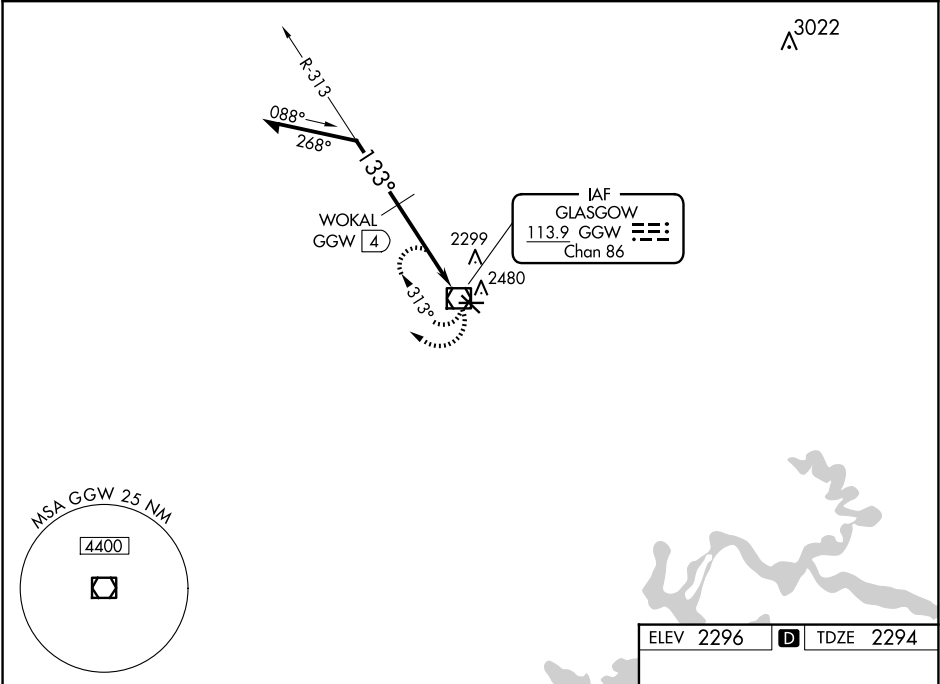

ELEV 2296 TDZE 2294				
Remain within 10 NM GGW VOR/DME 4100 WOKAL GGW 4 313° 133° *3140 4 NM *3300 when using Wolf Point altimeter settings 133° to VOR/DME 5000 X 75 5002 X 100 2334				
CATEGORY	A	B	C	D
S-12	3140-1 846 (900-1)	3140-1¼ 846 (900-1¼)	3140-2½ 846 (900-2½)	3140-2¾ 846 (900-2¾)
CIRCLING	3140-1¼ 844 (900-1¼)		3140-2½ 844 (900-2½)	3140-2¾ 844 (900-2¾)
WOKAL FIX MINIMUMS				
S-12	2700-1 406 (500-1)		2700-1¼ 406 (500-1¼)	
CIRCLING	2780-1 484 (500-1)		2780-1½ 484 (500-1½)	2900-2 604 (700-2)

REIL Rwy 8, 12, 26 and 30

MIRL Rwy 8-26 and 12-30