

WAAS CH 69316 W17A	APP CRS 180°	Rwy Idg TDZE Apt Elev	6003 213 213
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

WEST MEMPHIS MUNI (A WM)

RNP APCH.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use Memphis Intl altimeter setting and increase LPV DA to 513 feet, LNAV/VNAV DA to 644 feet and all visibilities ¼ SM; increase all MDAs 60 feet and increase visibility LNAV Cat C and Circling Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Memphis Intl altimeter setting.

MALSRR

MISSED APPROACH: Climb to 2100 direct USUPE and hold.

ASOS 118.175	MEMPHIS APP CON 119.1 291.6	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	---------------------------------------	--------------------------	---

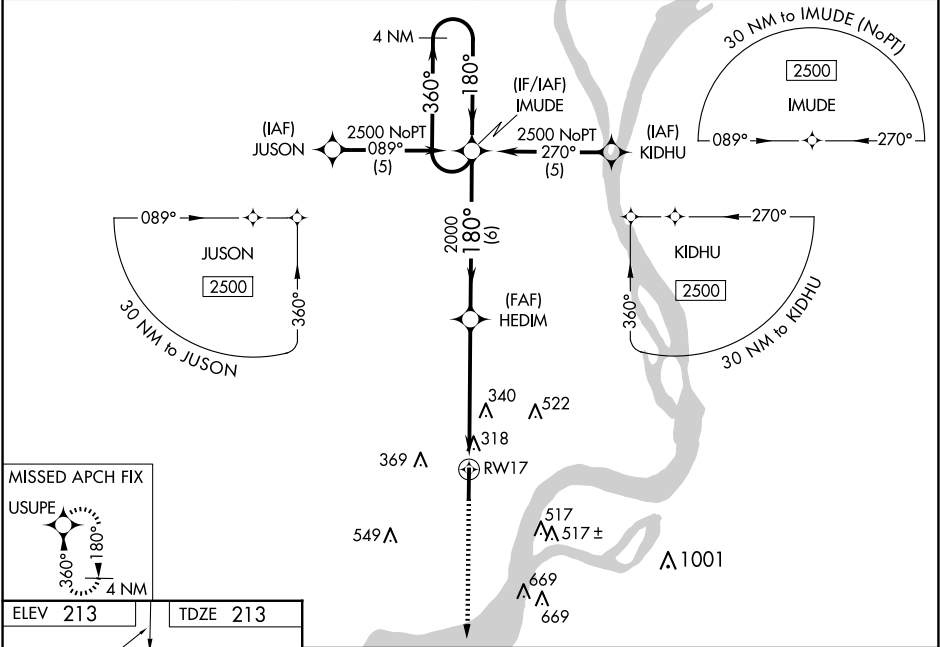

ELEV 213

TDZE 213

180° to RWY 17

4 NM

6003 x 100

35

MIRL Rwy 17-35 **0**

REIL Rwy 35 **0**

2100	USUPE			
*LNAV only.				
RWY 17 1 4.4 NM 6 NM HEDIM IMUDE 2000 2500 180° 360° 4 NM Holding Pattern				
GP 3.00° TCH 51				
CATEGORY	A	B	C	D
LPV DA	463-½		250 (300-½)	
LNAV/VNAV DA	594-¾		381 (400-¾)	
LNAV MDA	600-½	387 (400-½)	600-⅝ 387 (400-⅝)	600-1 387 (400-1)
CIRCLING	640-1 427 (500-1)	740-1 527 (600-1)	800-1½ 587 (600-1½)	920-2¼ 707 (800-2¼)