


WAAS CH 82026 W04A	APP CRS 044°	Rwy Idg 5000 TDZE 1664 Apt Elev 1664
--	------------------------	---

RNAV (GPS) RWY 4
ROCKWOOD MUNI (RKW)

NA Baro-VNAV NA when using Crossville altimeter setting. For uncompensated Baro-VNAV systems, NA/VNAV NA below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting: increase DA to 1989 feet and LPV and NA/VNAV visibility all Cats ¼ SM, increase all MDA 80 feet and NA/VNAV Cat C and D visibility ⅓ SM and Circling Cat C visibility ½ SM.

MISSED APPROACH: Climb to 5600 direct LOCIC and hold, continue climb-in-hold to 5600.

AWOS-3 118.775	ATLANTA CENTER 133.6 254.3	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

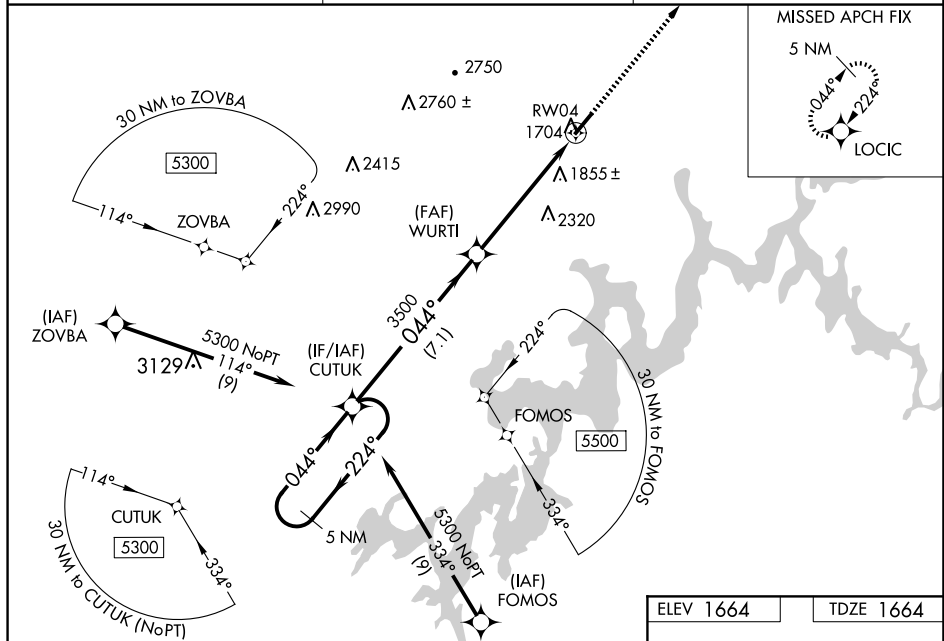

5 NM Holding Pattern

5300

←224°
044°→

CUTUK

GP 3.00°
TCH 51

WURTI

3500

044°

3500

RW04

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 26).

5600

LOCIC

CATEGORY		A		B		C		D	
LPV	DA	1914- $\frac{3}{4}$		250 (300- $\frac{3}{4}$)					
LNAV/ VNAV	DA	1914- $\frac{3}{4}$		250 (300- $\frac{3}{4}$)					
LNAV MDA		2100-1 436 (500-1)		2100-1 $\frac{3}{8}$ 436 (500-1 $\frac{3}{8}$)					
CIRCLING		2100-1 436 (500-1)	2200-1 536 (600-1)	2260-1 $\frac{1}{2}$ 596 (600-1 $\frac{1}{2}$)	2780-3 1116 (1200-3)				

