

WAAS CH 86413 W07A	APP CRS 070°	Rwy Ldg TDZE 1307 Apt Elev 1307
--	------------------------	---

RNAV (GPS) RWY 7

WEXFORD COUNTY (CAD)

RNP APCH - GPS.

▼

▲


Inop table does not apply to LPV all Cats and LNAV Cats A and B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. Circling NA to Rwys 18 and 36. Rwy 7 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LNAV/VNAV visibility all Cats to 1½ SM.

MALSF

MISSSED APPROACH:

Climb to 3000 direct TEVUY and hold.

AWOS-3P 128.325	MINNEAPOLIS CENTER 132.9 338.3	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

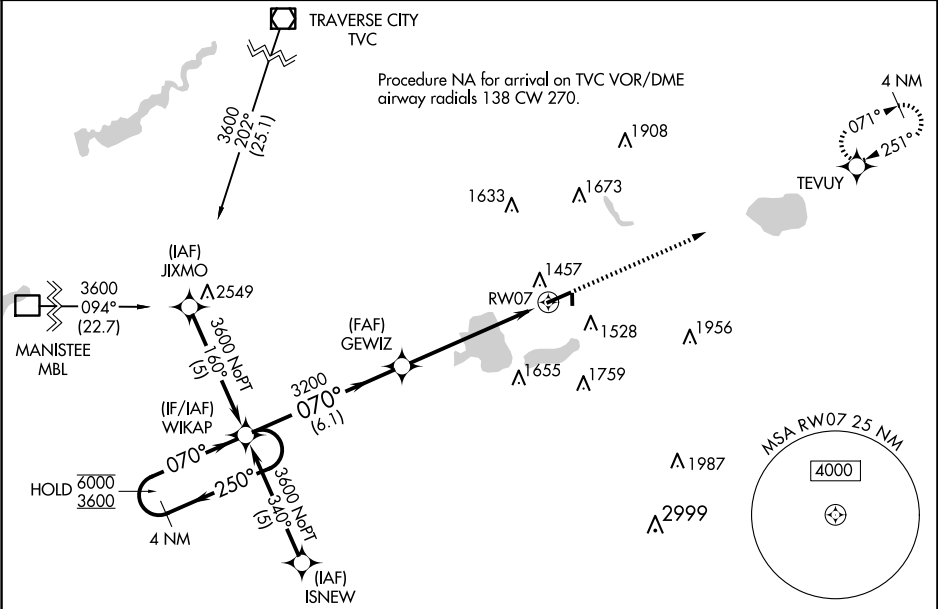

ELEV 1307

TDZE 1307

4 NM Holding Pattern

GP 3.05° TCH 45

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).

TEVUY

6000

3600

250°

070°

070°

3200

6.1 NM

4.4 NM

1.4 NM

1.4 NM to RW07

RW07

CATEGORY	A	B	C	D
LPV DA		1557-¾	250 (300-¾)	
LNAV/VNAV DA		1761-1	454 (500-1)	
LNAV MDA	1780-¾	473 (500-¾)	1780-1½	473 (500-1½)
CIRCLING	1820-1 513 (600-1)	1840-1 533 (600-1)	1860-1½ 553 (600-1½)	2060-2½ 753 (800-2½)

HIRL Rwy 7-25 0

REIL Rwys 7 and 25 0