
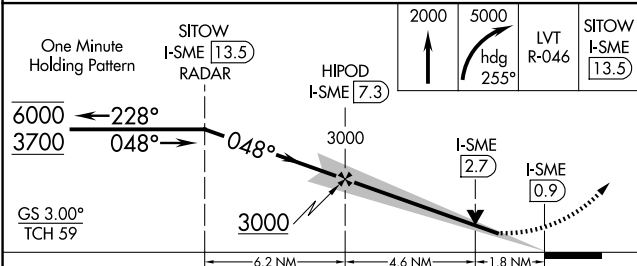


LOC/DME	I-SME	APP CRS	Rwy Ldg	5287
109.3		048°	TDZE	927
Chan 30			Apt Elev	927

ILS or LOC RWY 5
LAKE CUMBERLAND RGNL (SME)

DME required.	MISSED APPROACH: Climb to 2000 then climbing right turn to 5000 on heading 255° and on LVT VOR/DME R-046 to SITOW/13.5 DME/RADAR and hold, continue climb-in-hold to 5000.
▼ Rwy 5 helicopter visibility reduction below ¾ SM NA. VDP NA when using EKQ altimeter setting. When local altimeter setting not received, use EKQ altimeter setting and increase S-ILS 5 DA to 1526 feet and all visibilities ½ SM; increase all MDAs 60 feet and S-LOC 5 visibility Cat C/D ½ SM, and Circling visibility Cat B ¼ SM. GS unusable for coupled approach below 1620. ▲	

AWOS-3 120.05	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 122.8 (CTAF) 0
------------------	--	--------------------------

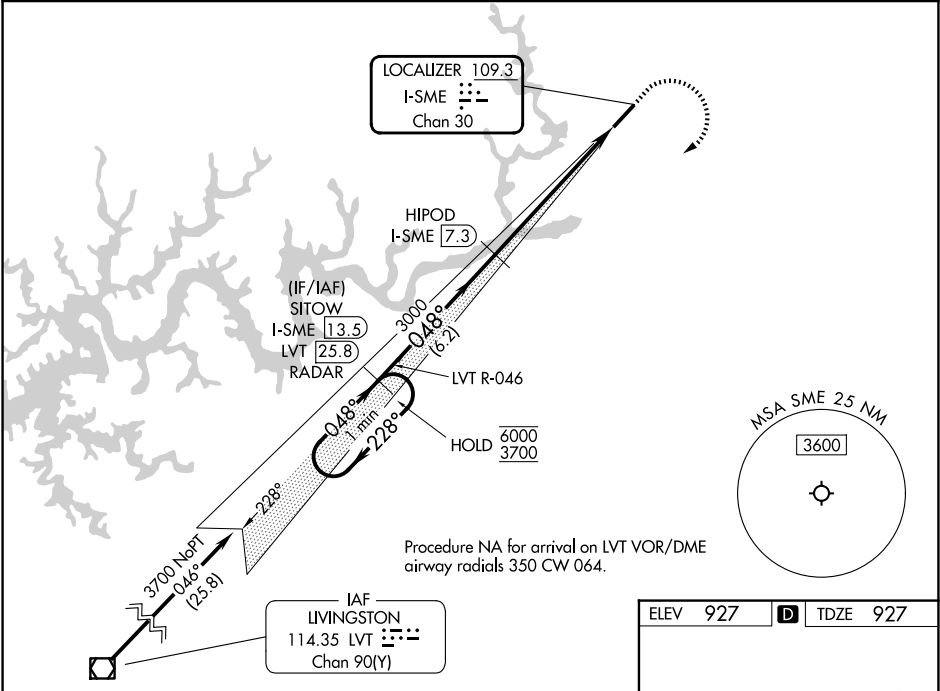

CATEGORY	A	B	C	D
S-ILS 5	1482-1 5/8	555 (600-1%)		
S-LOC 5	1540-1 613 (700-1)	1540-1 3/4 613 (700-1 3/4)		
CIRCLING	1580-1 653 (700-1)	1700-1 773 (800-1)	2100-3 1173 (1200-3)	

