

WAAS CH 97321 W01A	APP CRS 010°	Rwy Idg TDZE 626 Apt Elev 638
--	------------------------	---

RNAV (GPS) RWY 1L
TULSA RIVERSIDE (RVS)


RNP APCH - GPS.

⚠


Circling NA northeast of Rwy 31 and 19L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TUL altimeter setting. When local altimeter setting not received, use TUL altimeter setting: increase LPV DA to 871 feet; increase LNAV/VNAV DA to 1152 feet and all visibilities ½ SM. Increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct KEVIL and hold.

ATIS 126.5	TULSA APP CON 134.7	RIVERSIDE TOWER★ 120.3 (CTAF) 0	GND CON 121.7	CLNC DEL 124.5	UNICOM 122.95
----------------------	-------------------------------	--	-------------------------	--------------------------	-------------------------

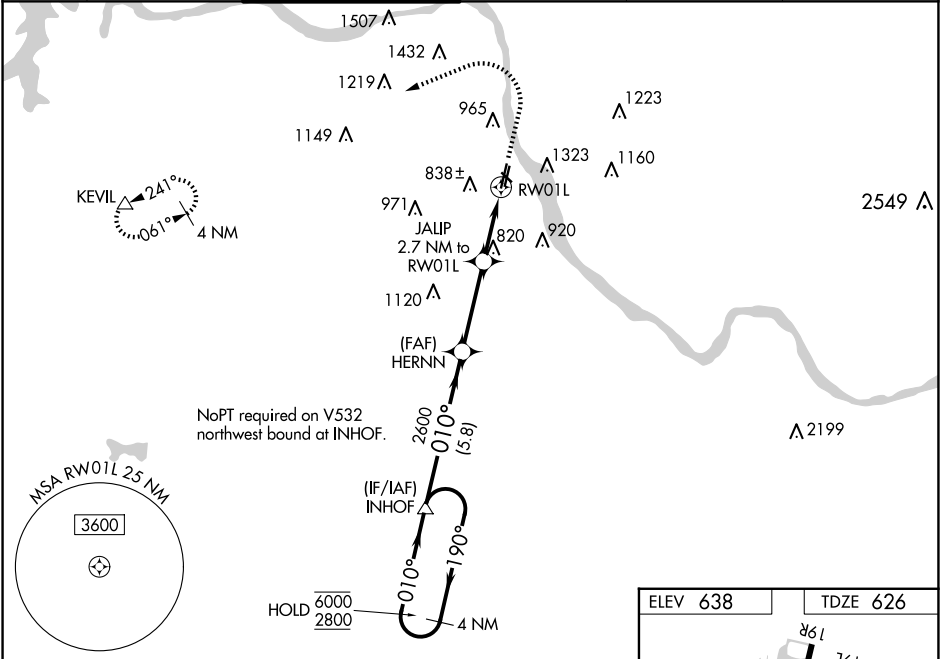

4 NM Holding Pattern		INHOF		HERNN		JALIP		KEVIL	
6000 ← 190°		010° →		2600		2.7 NM to RW01L		1.3 NM to RW01L	
2800				2600		1540		RW01L	
GP 3.00° TCH 48		5.8 NM		3.3 NM		1.5 NM		1.3 NM	
CATEGORY		A		B		C		D	
LPV DA				845-¾		219 (300-¾)			
LNAV/VNAV DA				1126-1⅜		500 (500-1⅜)			
LNAV MDA		1080-1		454 (500-1)		1080-1⅜		454 (500-1⅜)	
CIRCLING		1260-1 622 (700-1)		1280-1 642 (700-1)		1280-1¾ 642 (700-1¾)		1380-2½ 742 (800-2½)	

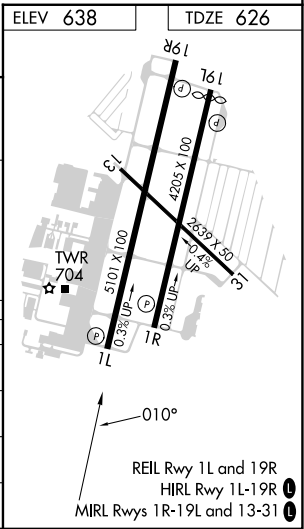

SC-1, 27 NOV 2025 to 25 DEC 2025

SC-1, 27 NOV 2025 to 25 DEC 2025