


WAAS CH 53626 W08B	APP CRS 087°	Rwy Ldg TDZE 96 Apt Elev 96
--	------------------------	---

RNAV (GPS) Z RWY 8R

GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop MALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 6000, and LNAV Cat C/D/E visibility to 1½. Simultaneous approach authorized with Rwy 8L and Rwy 9. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.		MALS 	MISSED APPROACH: Climb to 3000 direct MKAYE and hold.
D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 125.35 290.2	GND CON 118.575

RADAR REQUIRED

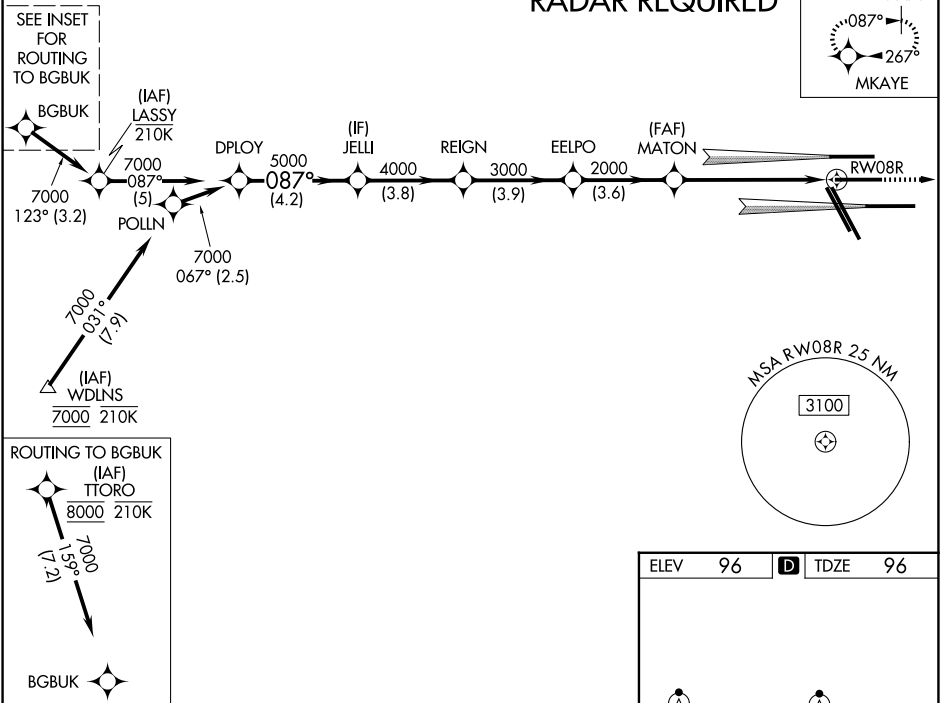

DPLY		JELLI		REIGN		EELPO		MATON		3000	MKAYE
7000		087°		5000		4000		3000		2000	
GP 3.00°		TCH 55		4.2 NM		3.8 NM		3.9 NM		3.6 NM	
CATEGORY		A		B		C		D		E	
LPV		DA		296/18		200 (200-½)					
LNAV/VNAV		DA		421/32		325 (400-¾)					
LNAV MDA		580/24		484 (500-½)		580/50		484 (500-1)			

