

WAAS CH 57913 W33A	APP CRS 330°	Rwy Ldg TDZE 831 Apt Elev 833
--	------------------------	---

RNAV (GPS) RWY 33

LAWRENCE RGNL (LWC)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TOP altimeter setting. When local altimeter setting not received, use TOP altimeter setting and increase LPV DA to 1083 feet, increase LNAV/VNAV DA to 1252 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MALSR

AS

MISSED APPROACH: Climb to 2700 direct RIBCO and hold.

ASOS 121.225	KANSAS CITY CENTER 123.8 343.7	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

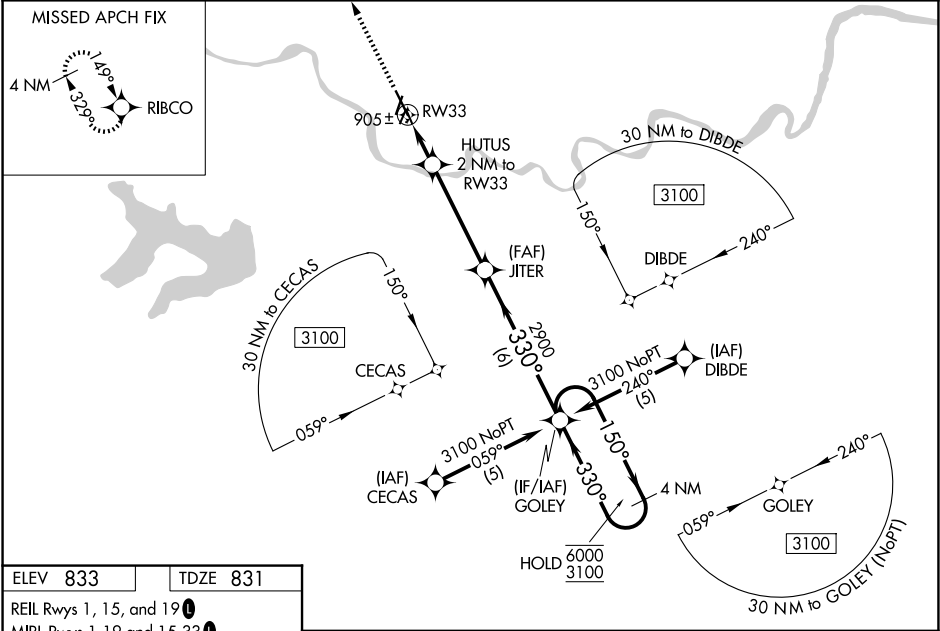

ELEV 833

TDZE 831

REIL Rwy 1, 15, and 19

MIRL Rwy 1-19 and 15-33

MILK Rwy's 1-19 and 13-33

CATEGORY	A	B	C	D
LPV DA	1031-¾ 200 (200-¾)			NA
LNAV/VNAV DA	1200-¾ 369 (400-¾)			NA
LNAV MDA	1220-¾ 389 (400-¾)			NA
CIRCLING	1420-1 587 (600-1)	1480-1 647 (700-1)	1620-2¼ 787 (800-2¼)	NA