


WAAS CH 69601 W13A	APP CRS 132°	Rwy Idg 5002 TDZE 962 Apt Elev 962
--	------------------------	---

RNAV (GPS) RWY 13

LIVINGSTON COUNTY SPENCER J HARDY (OZW)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 2800 direct BROVI and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 37°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.		

AWOS-3 118.875	DETROIT APP CON 132.35 284.0	CLNC DEL 121.725 (GCO)	UNICOM 123.0 (CTAF) 0
--------------------------	--	----------------------------------	---------------------------------

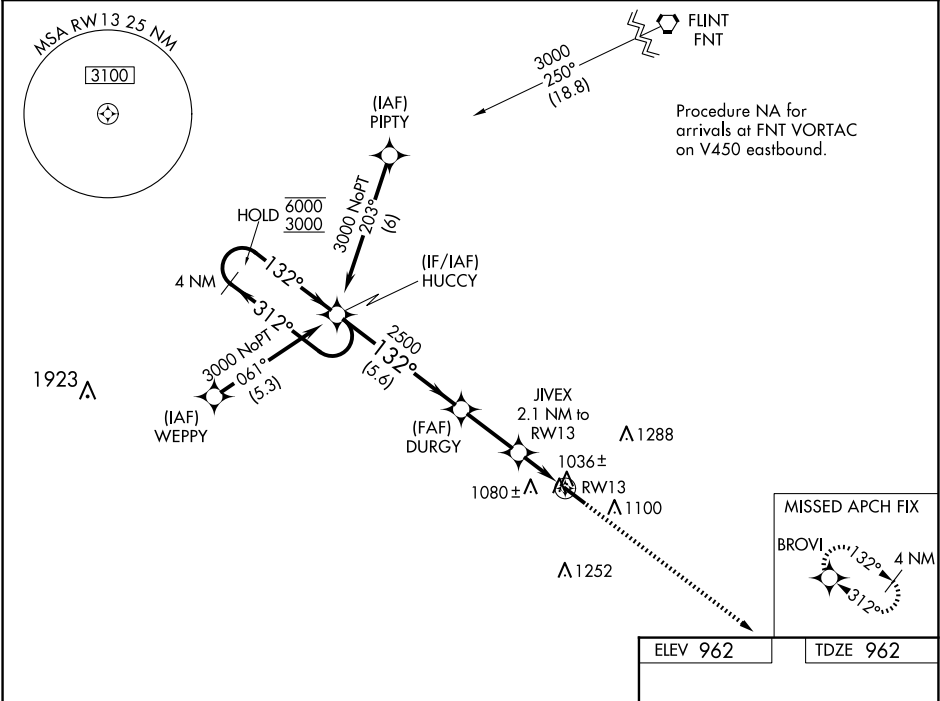

4 NM Holding Pattern HUCCY					2800 BROVI
6000 ← 312° 3000 132° → 132°					JIVEX 2.1 NM to RW13 *LNAV only
GP 3.00° TCH 48					*0.9 NM to RW13
2500					RW13
5.6 NM					*1660
2.6 NM					
1.2					
0.9					
CATEGORY	A	B	C	D	
LPV DA		1162-½	200 (200-½)		
LNAV/VNAV DA		1212-½	250 (300-½)		
LNAV MDA		1300-½	338 (400-½)		
CIRCLING	1400-1 438 (500-1)	1420-1 458 (500-1)	1600-1¾ 638 (700-1¾)	1600-2 638 (700-2)	

