

FORT BELVOIR, VIRGINIA

ILS or LOC RWY 32

|               |          |              |
|---------------|----------|--------------|
| LOC/DME I-DAA | APCH CRS | Rwy Idg      |
| 108.9         | 322°     | 4529         |
| Chan 26       |          | TDZE 68      |
|               |          | Arpt Elev 74 |

[USA]

DAVISON AAF (KDAV)

RADAR required for procedure entry from DCA VOR.

- When ALS inop, increase RVR to 45, vis to 7/8 mile.
- When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/8 miles.
- When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/8 miles.

MALSF




MISSED APPROACH: Climb to 800, then climbing left turn to 3000 direct to HAXIL (DCA R-181/17.4 DME) and hold. Continue climb in hold to 3000.


|         |                 |                      |             |          |
|---------|-----------------|----------------------|-------------|----------|
| ATIS    | POTOMAC APP CON | TOWER                | GND CON     | CLNC DEL |
| 128.175 | 118.95 319.1    | 124.275 (CTAF) 229.4 | 121.9 351.8 | 351.8    |

If local altimeter setting not received, use Ronald Reagan Washington National altimeter setting.

Visibility reduction by helicopters not authorized.

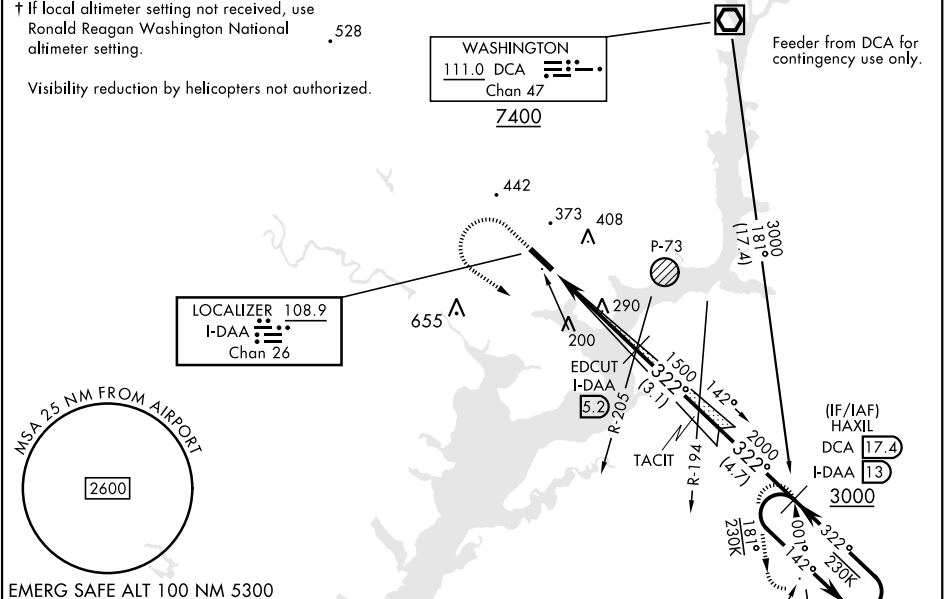


EMERG SAFE ALT 100 NM 5300

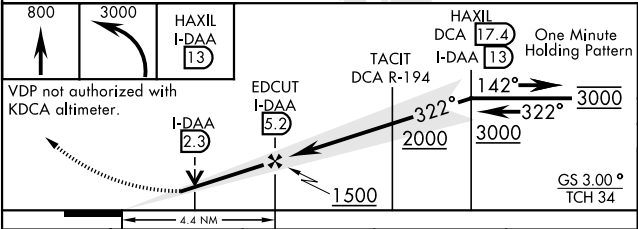

| CATEGORY                                                       | A                    | B                    | C                    | D                      |
|----------------------------------------------------------------|----------------------|----------------------|----------------------|------------------------|
| S-ILS 32*                                                      | 348/40               | 280                  | (300-3/4)            |                        |
| S-LOC 32**                                                     | 580/40               | 512 (600-3/4)        | 580-1 1/4            | 512 (600-1 1/4)        |
| CIRCLING                                                       | 680-1<br>606 (700-1) | 720-1<br>646 (700-1) | 760-2<br>686 (700-2) | 1000-3<br>926 (1000-3) |
| † RONALD REAGAN WASHINGTON NATIONAL ALTIMETER SETTING MINIMUMS |                      |                      |                      |                        |
| S-ILS 32                                                       | 388/40               | 320                  | (400-3/4)            |                        |
| S-LOC 32***                                                    | 620/40               | 552 (600-3/4)        | 620-1 1/8            | 552 (600-1 1/8)        |
| CIRCLING                                                       | 720-1<br>646 (700-1) | 760-1<br>686 (700-1) | 800-2<br>726 (800-2) | 1040-3<br>966 (1000-3) |

|         |         |
|---------|---------|
| ELEV 74 | TDZE 68 |
|---------|---------|

Rwy 14 Idg 4930'  
Rwy 32 Idg 4529'



|                |                          |
|----------------|--------------------------|
| HIRL Rwy 14-32 | FAF to MAP 4.4 NM        |
| Knots          | 60 90 120 150 180        |
| Min:Sec        | 4:24 2:56 2:12 1:46 1:28 |

FORT BELVOIR, VIRGINIA

38°43'N-77°11'W

DAVISON AAF (KDAV)

Amtd 1 23JAN25

ILS or LOC RWY 32

NE-3, 27 NOV 2025 to 25 DEC 2025

NE-3, 27 NOV 2025 to 25 DEC 2025