

WAAS CH 69532 W10A	APP CRS 103°	Rwy Ldg TDZE Apt Elev 5006 897 906
--	------------------------	--

RNAV (GPS) RWY 10

L O SIMENSTAD MUNI (O/E O)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using Anoka County/Blaine (Janes Fld) altimeter setting. When local altimeter setting not received, use Anoka County/Blaine (Janes Fld) altimeter setting; increase LPV DA to 1204 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1247 feet and visibility all Cats ¼ SM; increase all MDAs 60 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ¼ SM. Rwy 10 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy 4 and 22.

MISSED APPROACH:
Climb to 3000 direct
ECLEY and hold.

AWOS-3 119.925	MINNEAPOLIS APP CON 121.2 335.65	GCO 121.725	CTAF 122.9 0
--------------------------	--	-----------------------	------------------------

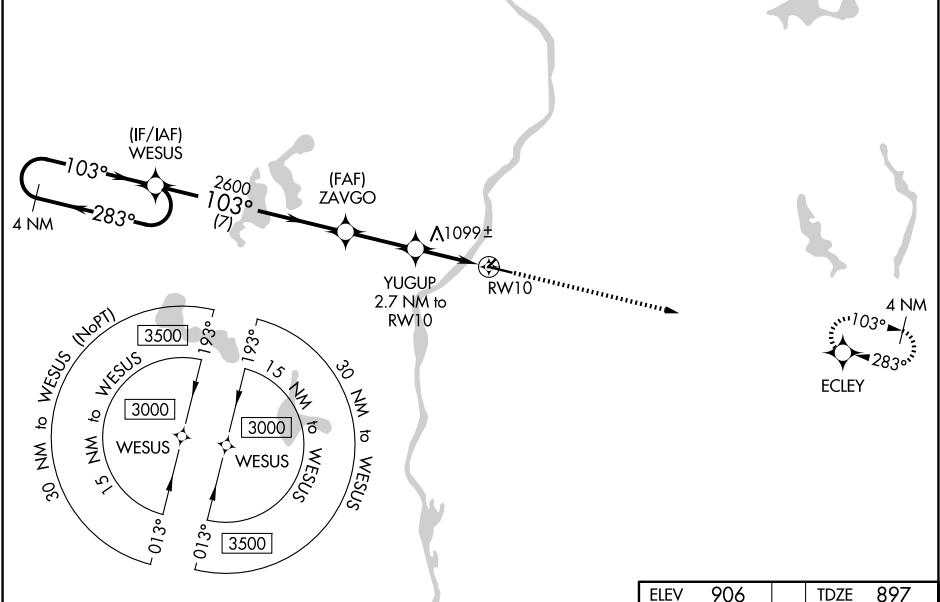

4 NM Holding Pattern		WESUS		ZAVGO		YUGUP		RWY 10	
3000		283°		103°		2600		*1760	
GP 3.00°		TCH 35		7 NM		2.6 NM		1.3 NM	
CATEGORY		A		B		C		D	
LPV DA		1147-7/8		250 (300-7/8)		NA		NA	
LNAV/VNAV DA		1190-1		293 (300-1)		NA		NA	
LNAV MDA		1360-1		463 (500-1)		1360-1 3/8 463 (500-1 3/8)		NA	
CIRCLING		1360-1 454 (500-1)		1500-1 594 (600-1)		1520-1 3/4 614 (700-1 3/4)		NA	

