
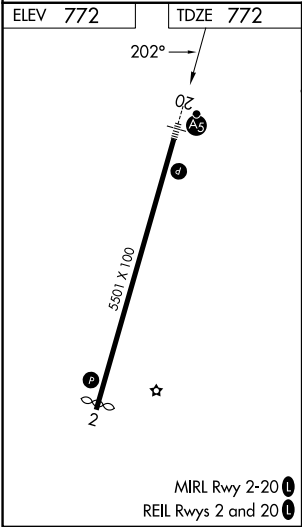


WAAS CH 42521 W20A	APP CRS 202°	Rwy Ldg TDZE 772 Apt Elev 772
--	------------------------	---

RNAV (GPS) RWY 20
MID-CAROLINA RGNL (RUQ)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LNAV Cat C and D visibility ½ SM and Circling Cat C visibility ¼ SM and Circling Cat D ¼ SM. For inop ALS when using Lexington altimeter setting, increase LNAV Cat C and D visibility to 1¾ SM. VDP and Baro-VNAV NA when using Lexington altimeter setting. For inop ALS, increase LNAV/VNAV visibility to ¾ SM all Cats.	MALSR AS	MISSED APPROACH: Climb to 2100 then climbing right turn to 3400 direct YIDPO and hold.
--	-------------------------------	---

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

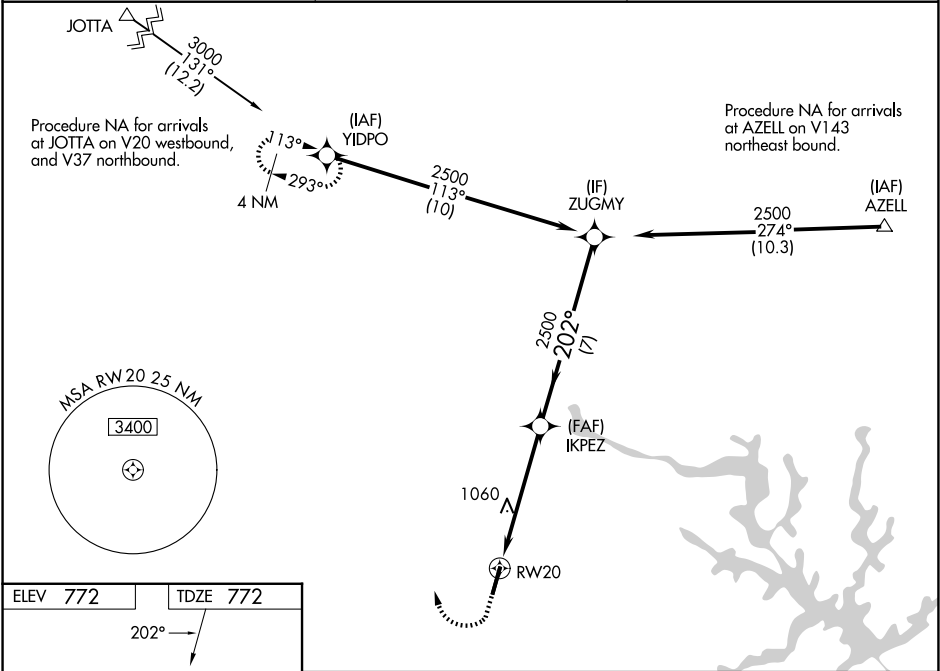

2100	3400	YIDPO		
*LNAV only.				
IKPEZ 2500				
ZUGMY 2500				
GP 3.00° TCH 46				
1.7 NM 3.6 NM 7 NM				
CATEGORY	A	B	C	D
LPV DA	972-½ 200 (200-½)			
LNAV/ VNAV DA	1032-½ 260 (300-½)			
LNAV MDA	1360-½	588 (600-½)	1360-1¼	588 (600-1¼)
CIRCLING	1360-1	588 (600-1)	1440-1¾ 668 (700-1¾)	1440-2 668 (700-2)