

LOC I-PEK
110.3

APP CRS
257°

Rwy Ldg **10000**
TDZE **27**
Apt Elev **30**

ILS Y or LOC Y RWY 26

JACKSONVILLE INTL (JAX)


ADF required. RADAR required for procedure entry.

For inop ALS, ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6
-------------------------	--	--	-------------------------------

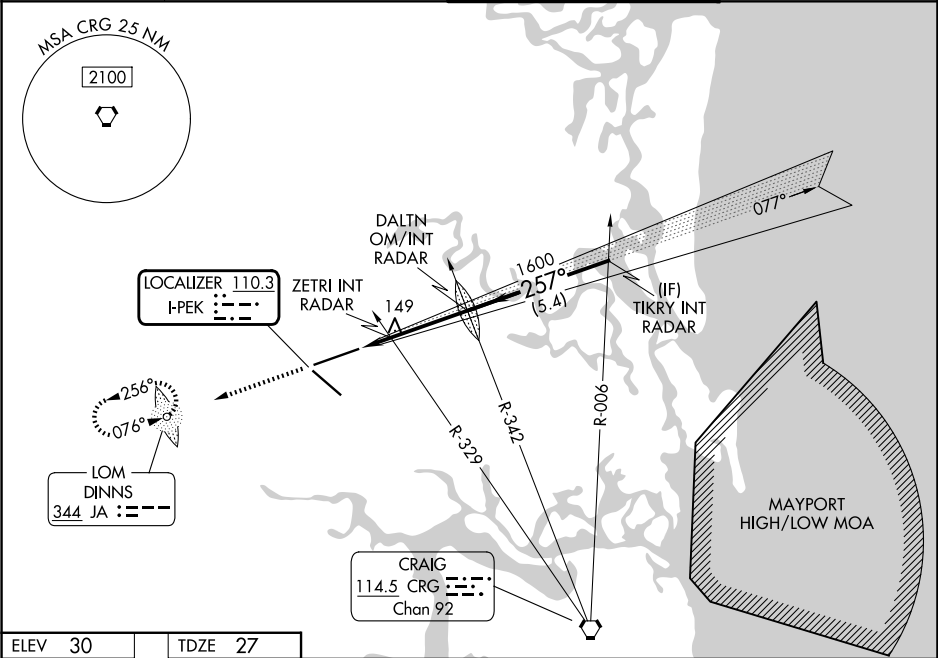

ELEV 30 TDZE 27

REIL Rwy 32
TDZL/RCLS Rws 8, 14, and 26
HIRL Rws 8-26 and 14-32

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

3000 DINNS VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).				
ZETRI INT RADAR DALTN OM/INT RADAR TIKRY INT RADAR				
GS 3.00° TCH 55				
CATEGORY	A	B	C	D
S-ILS 26	227/18 200 (200-½)			
S-LOC 26	480/24	453 (500-½)	480/45	453 (500-¾)
CIRCLING	520-1	490 (500-1)	580-1½ 550 (600-1½)	580-2 550 (600-2)
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 26	400/24	373 (400-½)	400/35	373 (400-¾)
CIRCLING	520-1	490 (500-1)	580-1½ 550 (600-1½)	580-2 550 (600-2)