
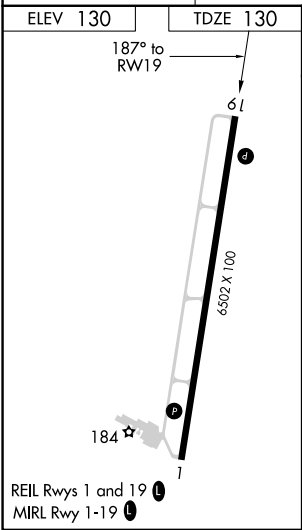


WAAS CH 56627 W19A	APP CRS 187°	Rwy Idg TDZE Apt Elev	6502 130 130
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
HARRELL FLD (CDH)

RNP APCH-GPS.		MISSED APPROACH: Climb to 2700 direct URAME and hold.
T A	Rwy 19 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using El Dorado altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use El Dorado altimeter setting and LPV DA to 517 feet, LNAV/VNAV DA to 503 feet and all MDA 80 feet; increase LPV all Cats visibility ½ SM, and LNAV Cats C and D, and Circling Cat D ¼ SM.	

AWOS-3 125.2	FORT WORTH CENTER 128.2 269.1	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

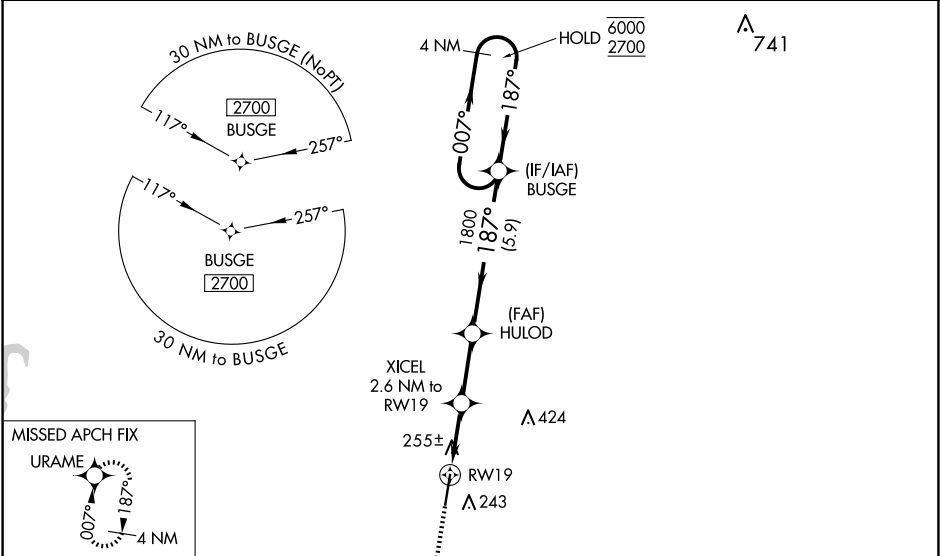

ELEV 130 TDZE 130		2700 URAM		4 NM Holding Pattern	
*LNAV only		XICEL 2.6 NM to RW19		BUSGE	
RW19		HULOD 1800		007° → 6000	
1000*		1800		← 187° 2700	
-2.6 NM		-2.5 NM		5.9 NM	
CATEGORY	A	B	C	D	
LPV DA	440-1		310 (400-1)		
LNAV/VNAV DA	426-1		296 (300-1)		
LNAV MDA	520-1		390 (400-1)		
CIRCLING	560-1		580-1		
430 (500-1)		450 (500-1)		580-1½	
				390 (400-1½)	
				960-2¾	
				830 (900-2¾)	

SC-1, 27 NOV 2025 to 25 DEC 2025

SC-1, 27 NOV 2025 to 25 DEC 2025