

|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-MJX | APP CRS | Rwy Idg  | 5835 |
| 109.9     | 063°    | TDZE     | 81   |
|           |         | Apt Elev | 86   |

ILS or LOC RWY 6

OCEAN COUNTY (MJX)

▼


▲ NA

Circling Rwy 14, 32 NA at night. Inop table does not apply to S-ILS 6. For inop ALS, increase S-LOC 6 Cats A/B and S-LOC 6 XOQUR Fix minimums Cats A/B visibility to 1. When local altimeter setting not received, use Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase S-LOC 6 Cats C/D and Circling Cat C visibility ¾ mile, Cat D ¾ mile; increase XOQUR Fix minimums S-LOC 6 Cat C/D visibility ¾ mile and Circling Cat D ¾ mile. For inop ALS when using Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting, increase S-ILS 6 all Cats visibility to ¾ and S-LOC 6 Cats A/B and S-LOC 6 XOQUR Fix minimums Cats A/B visibility to 1, Cats C/D visibility to 1 ¾. Rwy 6 helicopter visibility reduction below ¾ SM NA.

MALSRL

MISSED APPROACH:  
Climb to 600 then  
climbing right turn to  
1900 direct CYN  
VORTAC then on  
CYN R-260 to SOITE  
INT/CYN 2.6 DME  
and hold.

|          |                  |                |
|----------|------------------|----------------|
| AWOS-3PT | MC GUIRE APP CON | UNICOM         |
| 119.875  | 126.475 363.8    | 122.7 (CTAF) 0 |

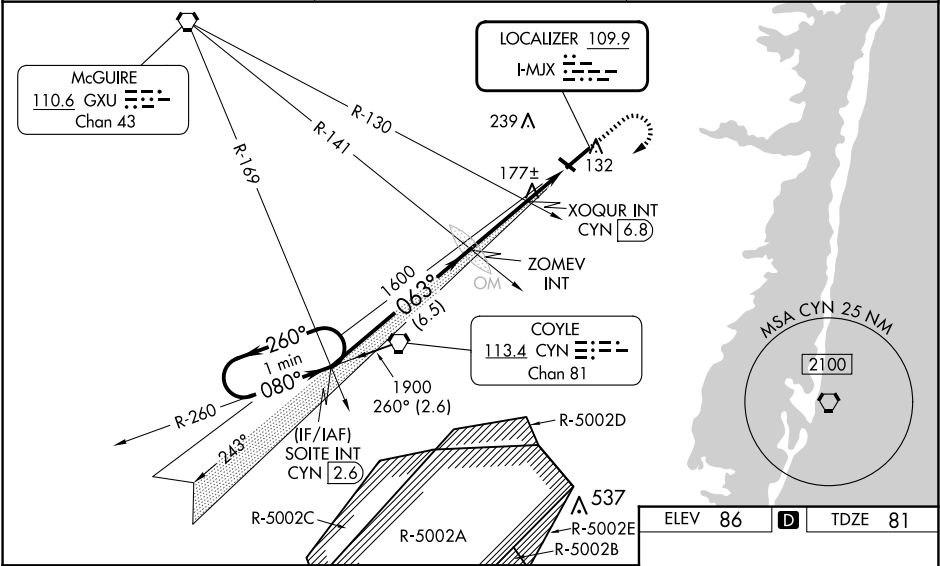

|                                                                      |             |             |              |               |           |
|----------------------------------------------------------------------|-------------|-------------|--------------|---------------|-----------|
| *720 when using Joint Base Mc Guire Dix Lakehurst altimeter setting. | 600         | 1900        | CYN          | CYN R-260     | SOITE INT |
| One Minute Holding Pattern                                           | 1900        | 260°        | 080°         | 063°          | 1600      |
| GS 3.00° TCH 56                                                      | 6.5 NM      | 2.7 NM      | 1.9 NM       |               |           |
| CATEGORY                                                             | A           | B           | C            | D             |           |
| S-ILS 6                                                              |             | 331-¾       | 250 (300-¾)  |               |           |
| S-LOC 6                                                              | 660-¾       | 579 (600-¾) | 660-1¼       | 579 (600-1¼)  |           |
| CIRCLING                                                             | 660-1       | 574 (600-1) | 660-1¾       | 700-2         |           |
|                                                                      |             |             | 574 (600-1¾) | 614 (700-2)   |           |
| XOQUR FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)              |             |             |              |               |           |
| S-LOC 6                                                              | 520-¾       | 439 (500-¾) | 520-7/8      | 439 (500-7/8) |           |
| CIRCLING                                                             | 540-1       | 560-1       | 580-1½       | 700-2         |           |
|                                                                      | 454 (500-1) | 474 (500-1) | 494 (500-1½) | 614 (700-2)   |           |

