
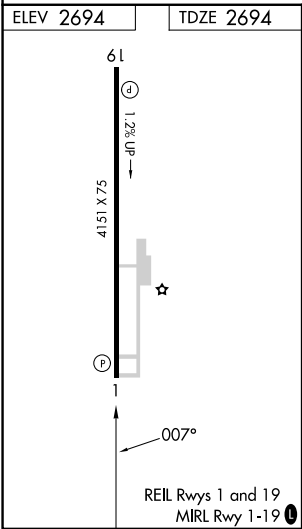


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>69527</b><br><b>W01A</b> | APP CRS<br><b>007°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4151</b><br><b>2694</b><br><b>2694</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 1  
TWIN COUNTY (HLX)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| RNP APCH - GPS.<br>▼ Baro-VNAV NA when using Dublin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. VDP NA with Dublin altimeter setting not received, use Dublin altimeter setting: increase LPV DA to 3103 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3154 feet and all visibilities ½ SM; increase all MDAs 140 feet and visibility LNAV Cats C and D ½ SM and Circling Cat C ¼ SM and Cat D ½ SM. | MISSED APPROACH: Climb to 3200 then climbing right turn to 5100 direct DOILY and hold, continue climb-in-hold to 5100. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|

|                          |                                       |                                 |
|--------------------------|---------------------------------------|---------------------------------|
| AWOS-3<br><b>118.375</b> | ROANOKE APP CON<br><b>126.0 339.8</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|---------------------------------------|---------------------------------|

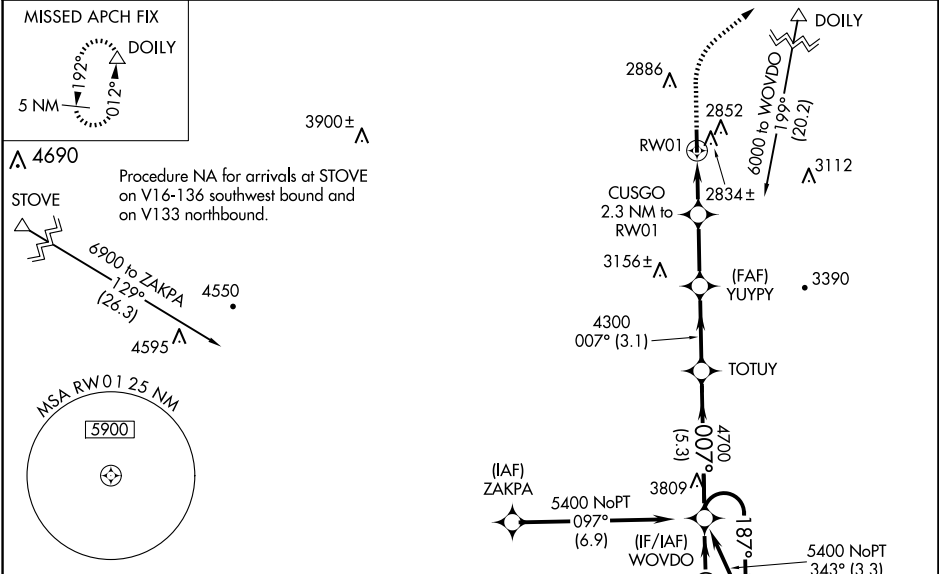

|                 |                      |             |                                                                  |                      |
|-----------------|----------------------|-------------|------------------------------------------------------------------|----------------------|
| 3200            | 5100                 | DOILY       | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21). | 5 NM Holding Pattern |
| *LNAV only.     | CUSGO 2.3 NM to RW01 | YUYPY 4300  | TOTUY                                                            | WOYDO                |
| 1.2 NM to RW01  | *3480                | 4300        | 007°                                                             | 187°                 |
| 1.2 NM          | 1.1 NM               | 2.6 NM      | 3.1 NM                                                           | 5.3 NM               |
| GP 3.00° TCH 55 |                      |             |                                                                  |                      |
| CATEGORY        | A                    | B           | C                                                                | D                    |
| LPV DA          | 2965-1               | 271 (300-1) |                                                                  |                      |
| LNAV/VNAV DA    | 3016-1               | 322 (400-1) |                                                                  |                      |
| LNAV MDA        | 3100-1               | 406 (500-1) | 3100-1½                                                          | 406 (500-1½)         |
| CIRCLING        | 3200-1               | 506 (600-1) | 3200-1½ 506 (600-1½)                                             | 3440-2½ 746 (800-2½) |