

MONROE, MICHIGAN

AL-5642 (FAA)

25163

WAAS CH 86707 W21A	APP CRS 208°	Rwy Ldg 4997 TDZE 616 Apt Elev 616
--	------------------------	---

RNAV (GPS) RWY 21
CLUSTER (TTF)


RNP APCH - GPS.

T
A


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Detroit Metro Wayne County altimeter setting: increase LPV DA to 1011 feet; increase LNAV/VNAV DA 1054 feet; increase all MDAs 60 feet and visibility LNAV Cat C and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Detroit Metro Wayne County altimeter setting. Circling to Rwy 3 NA at night.

MISSED APPROACH:
Climb to 3000 direct CIVIK
and on track 118° to GAKRE
and on track 031° to MACCS
and hold.

AWOS-3 119.075	DETROIT APP CON 134.3 363.2	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

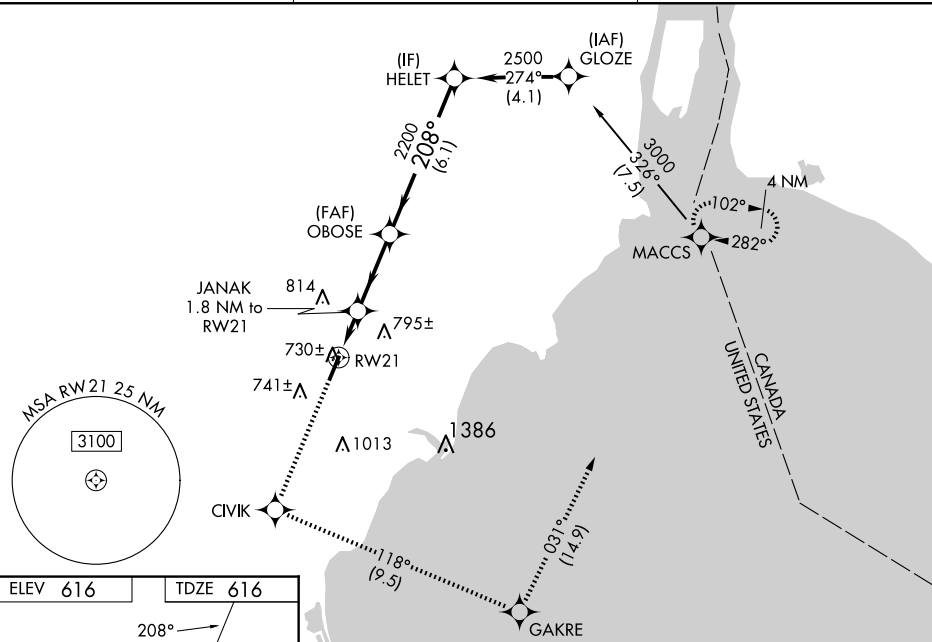

ELEV 616		TDZE 616
----------	--	----------

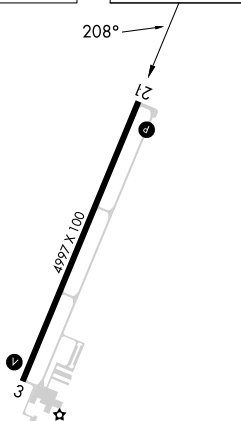

REIL Rwy 21 **L**
MIRL Rwy 3-21 **L**

3000 ↑	CIVIK ✦	tr 118° ✦	GAKRE ✦	tr 031° ✦	MACCS ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 49). OBOSE		HELET
* LNAV only. JANAK 1.8 NM to RW21 RW21 *0.9 NM to RW21 *1220 2200 208° 2500 GP 3.00° TCH 42								
CATEGORY		A		B		C		D
LPV	DA	966-1¼ 350 (400-1¼)						
LNAV/ VNAV	DA	1009-1½ 393 (400-1½)						
LNAV MDA		980-1 364 (400-1)						980-1¼ 364 (400-1¼)
CIRCLING		1120-1 504 (600-1)	1180-1 564 (600-1)	1380-2¼ 764 (800-2¼)	1380-2½ 764 (800-2½)			

MONROE, MICHIGAN
Orig-B 06OCT22

41°56'N-83°26'W

CUSTER (TTF)
RNAV (GPS) RWY 21

EC-1, 27 NOV 2025 to 25 DEC 2025

EC-1, 27 NOV 2025 to 25 DEC 2025