

WAAS
CH **93528**
W36A

APP CRS
359°

Rwy Idg
TDZE
343

Apt Elev
343

RNAV (GPS) RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)


RNP APCH-GPS.
Baro-VNAV NA when using Lufkin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Lufkin altimeter setting: increase LPV DA to 599 feet, LNAV/VNAV DA to 681 feet, and visibility LNAV/VNAV all Cats ½ SM, increase all MDA 60 feet and visibility LNAV Cat C ½ SM and Circling Cat C ½ SM.

MALSR
MISSED APPROACH: Climb to 2400 direct XOWNU and on track 352° to DRBOB and hold.

AWOS-3PT
135.625

HOUSTON CENTER
125.175 285.575

UNICOM
123.0 (CTAF)

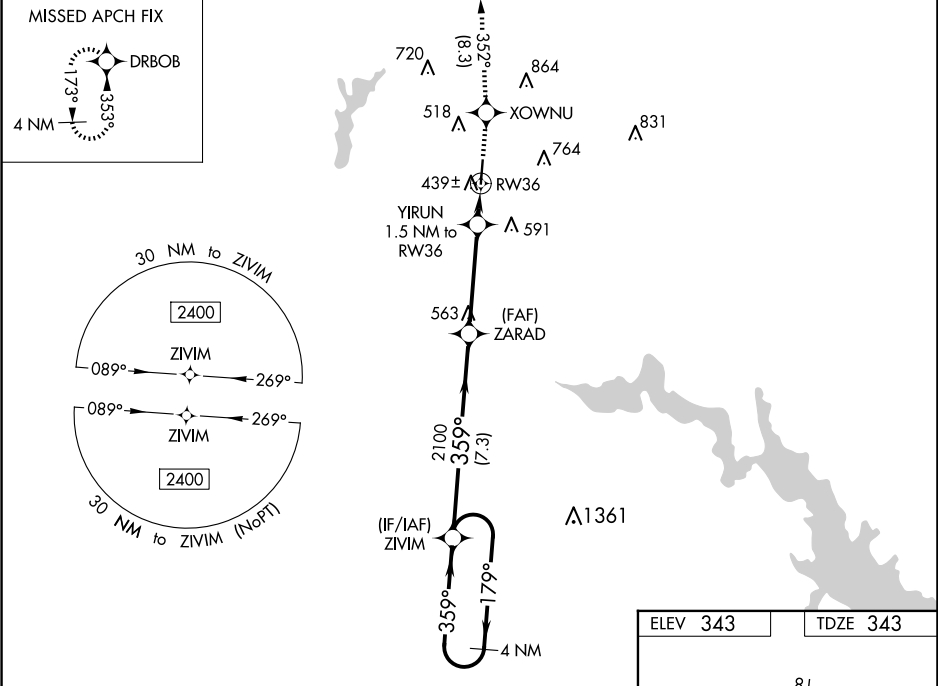

4 NM Holding Pattern

2400

XOWNU

DRBOB

GP 3.00°

TCH 53

7.3 NM

3.9 NM

1.5 NM

CATEGORY	A	B	C	D
LPV DA	543-½ 200 (200-½)			NA
LNAV/VNAV DA	625-½ 282 (300-½)			NA
LNAV MDA	700-½ 357 (400-½)	700-⅝ 357 (400-⅝)		NA
CIRCLING	860-1 517 (600-1)	1080-2 737 (800-2)		NA

8 l

REIL Rwy 18

MIRL Rwy 18-36