WAAS CH 40336 W04A	APP CRS 043°	Rwy ldg 4505 TDZE 92 Apt Elev 92

RNAV (GPS) RWY 4
MARION COUNTY (MAO)

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 53 feet and all visibilities ⅛ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.

MISSED APPROACH: Climb to 2000 direct SEROY and hold.

AWOS-3PT	FLORENCE APP CON ★	UNICOM
119.875	135.25 316.15	122.8 (CTAF)

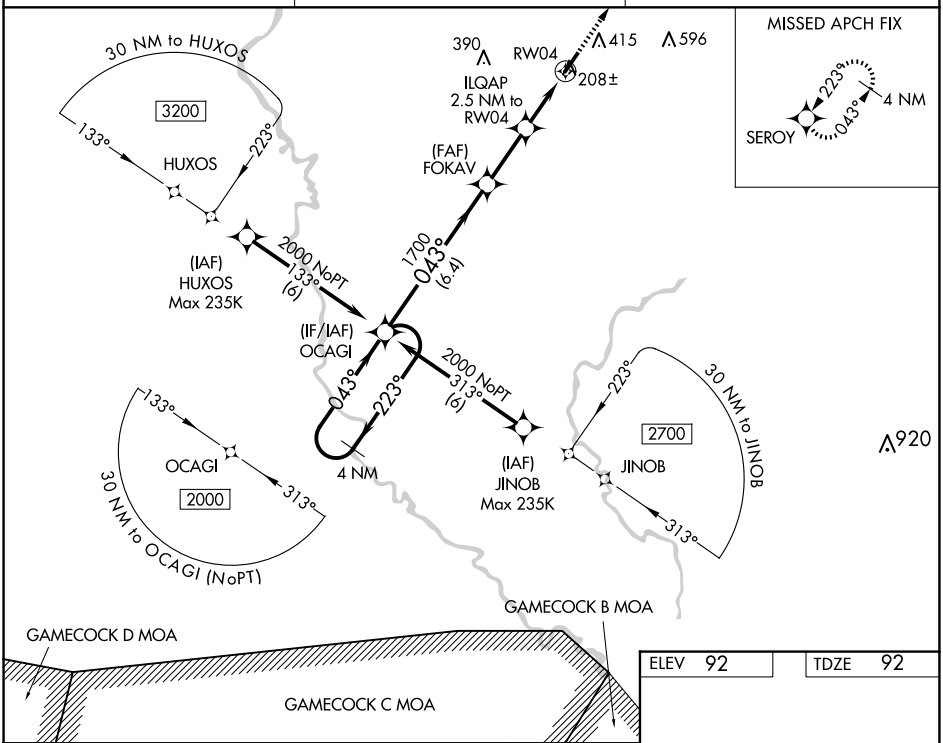

ELEV 92	TDZE 92

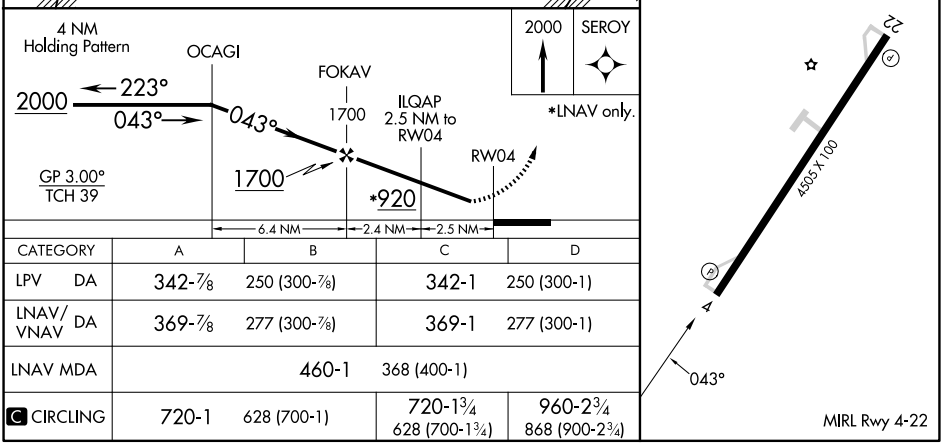

CATEGORY	A	B	C	D
LPV DA	342-⅞	250 (300-⅞)	342-1	250 (300-1)
LNAV/VNAV DA	369-⅞	277 (300-⅞)	369-1	277 (300-1)
LNAV MDA	460-1	368 (400-1)		
C CIRCLING	720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025