


WAAS CH 58220 W26A	APP CRS 257°	Rwy Idg TDZE 1260 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 26

CENTRAL WISCONSIN (CWA)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct PLEAD and hold.
For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C.	

ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER★ 119.75 (CTAF) 360.7	GND CON 121.9 360.7	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

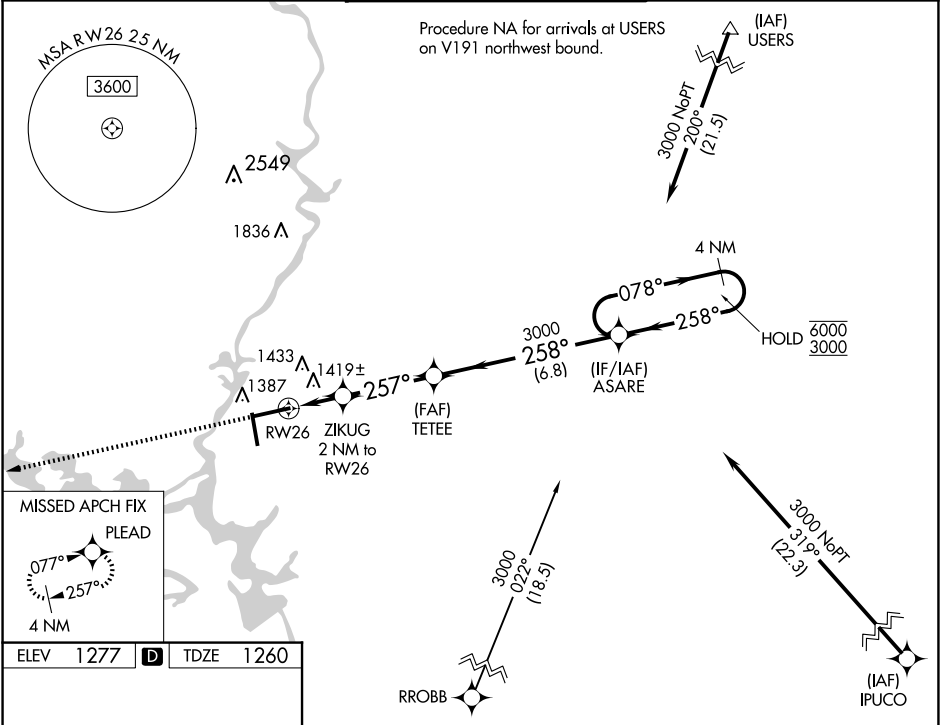

ELEV 1277	TDZE 1260	3000 PLEAD	TETEE	ASARE	4 NM Holding Pattern
1347 TWR 1355	7723 X 150	1.2 NM to RW26	3000	258°	078° 6000
051 X 1050	0.8 NM UP	0.8 NM	1940	258°	3000
35	REIL Rwy 17 and 26	1.2 NM	3.3 NM	6.8 NM	GP 3.00° TCH 45
HIRL Rwy 8-26 and 17-35					
CIRCLING					
CATEGORY	A	B	C	D	
LPV DA		1460-¾	200 (200-¾)		
LNAV/VNAV DA		1680-1⅛	420 (500-1⅛)		
LNAV MDA	1680-1	420 (500-1)	1680-1⅛	420 (500-1⅛)	
CIRCLING	1740-1	463 (500-1)	1740-1½	1840-2	563 (600-2)

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025