


WAAS CH 42820 W08A	APP CRS 077°	Rwy Idg TDZE Apt Elev	7723 1274 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 8
CENTRAL WISCONSIN (CWA)

RNP APCH - GPS.			MALSR	MISSED APPROACH: Climb to 3000 direct ASARE and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C and D visibility to 1½ SM.					
ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER ★ 119.75 (CTAF) 0 360.7		GND CON 121.9 360.7	UNICOM 122.95

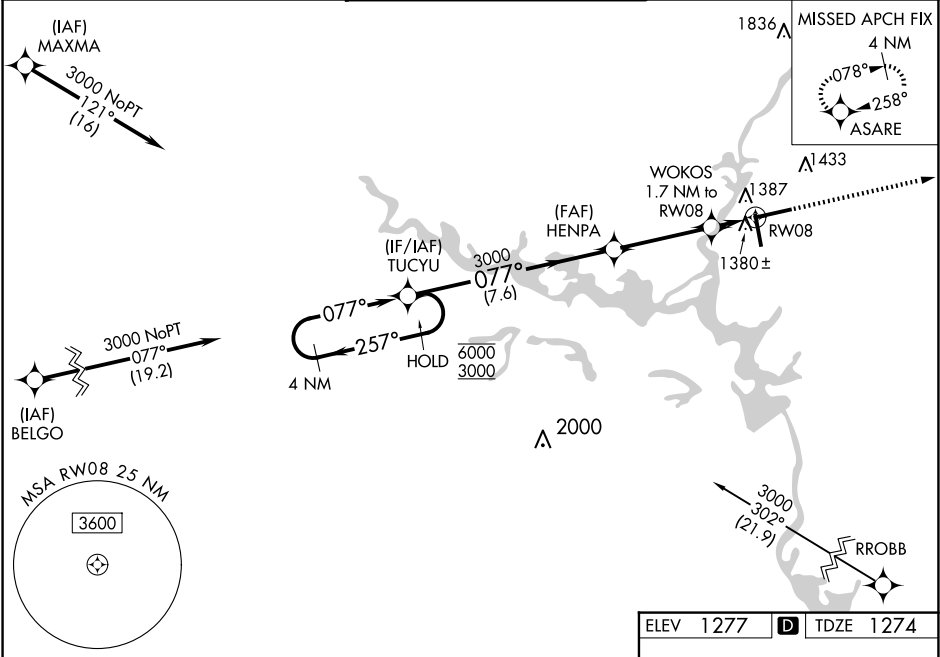

4 NM Holding Pattern		TUCYU	HENPA	3000	ASARE
6000 ← 257°		077° →		3000	
3000		077° →		3000	
GP 3.00°		1860		1.1 NM to RW08	
TCH 55		7.6 NM		0.6 NM	
		3.6 NM		1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1474-½		200 (200-½)		
LNAV/VNAV DA	1601-½		327 (400-½)		
LNAV MDA	1640-½ 366 (400-½)		1640-¾ 366 (400-¾)		
CIRCLING	1740-1 463 (500-1)		1740-1½ 463 (500-1½)		
			1840-2 563 (600-2)		

