WAAS CH 70417 W17A	APP CRS 173°	Rwy ldg 6824 TDZE 2589 Apt Elev 2589

RNAV (GPS) RWY 17
AINSWORTH RGNL (ANW)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cats C/D visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 5100 direct FUGLE and hold.

AWOS-3	DENVER CENTER	UNICOM
118.325	127.95 338.2	122.8 (CTAF) L

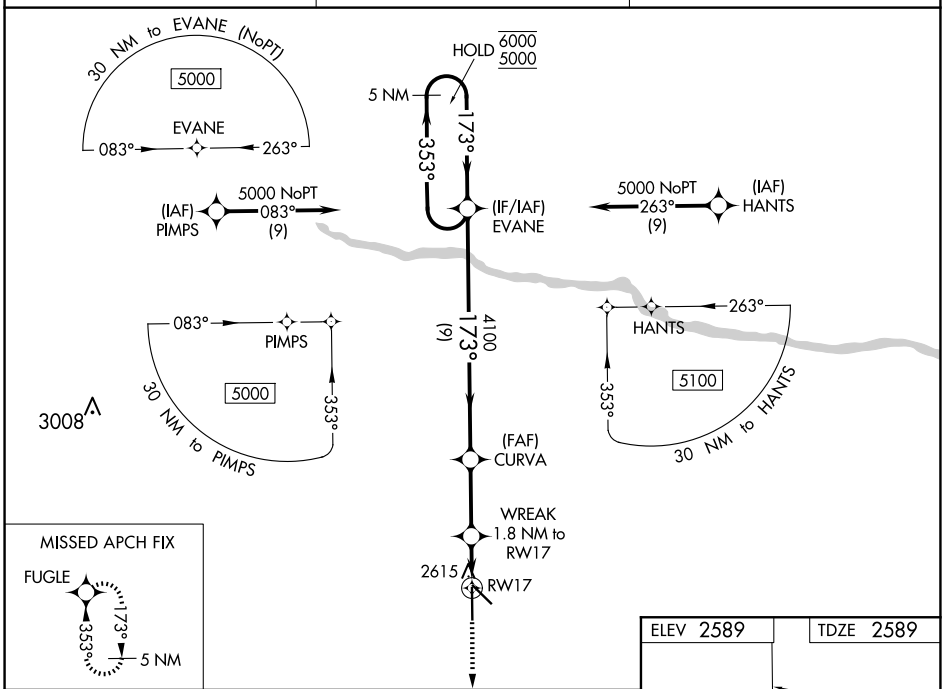

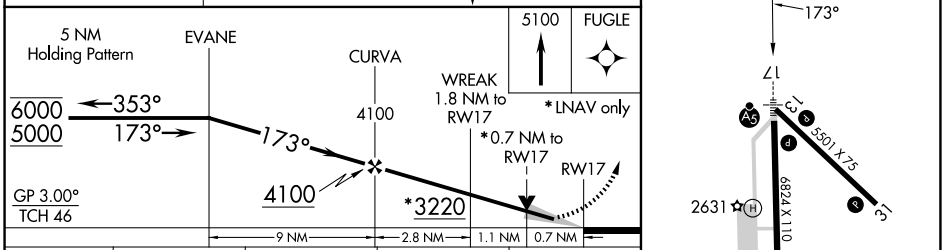

CATEGORY	A	B	C	D
LPV DA	2789-½ 200 (200-½)			
LNAV/VNAV DA	2839-½ 250 (300-½)			
LNAV MDA	2880-½ 291 (300-½)			
C CIRCLING	3000-1 411 (500-1)	3040-1 451 (500-1)	3040-1½ 451 (500-1½)	3200-2 611 (700-2)

HIRL Rwys 13-31 and 17-35 L
REIL Rwy 31 L

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025