

WAAS CH 60903 W28A	APP CRS 285°	Rwy Idg 6453 TDZE 967 Apt Elev 968
--	------------------------	---

RNAV (GPS) RWY 28
STATESVILLE RGNL (SVH)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 1218, LNAV/VNAV DA to 1269, and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility $\frac{1}{8}$, and Circling Cat C $\frac{1}{4}$ mile. VDP and Baro-VNAV NA when using Lincoln altimeter setting. For inop MALSR, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to $\frac{1}{2}$ mile. For inop MALSR when using Lincoln altimeter setting, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1 mile.

MALSR

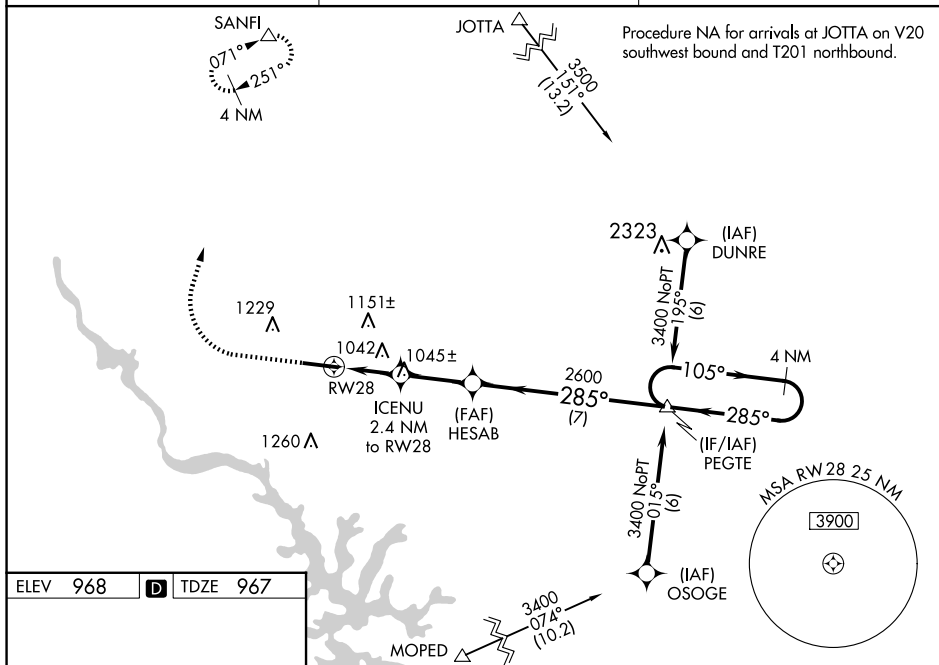


MISSED APPROACH:
Climb to 1380 then
climbing right turn
to 3400 direct
SANFI and hold.

AWOS-3
119.225

ATLANTA CENTER
125.15 263.0

UNICOM
123.075 (CTAF) **L**

[illegible]