
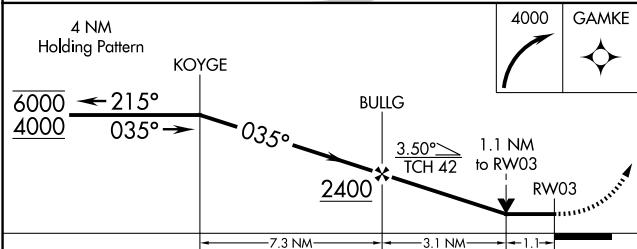


APP CRS 035°	Rwy Ldg	5000
	TDZE	812
	Apt Elev	819

RNAV (GPS) Y RWY 3
MADISON MUNI (IMS)

RNP APCH - GPS.	MALSF	MISSED APPROACH: Climbing right turn to 4000 direct GAMKE and hold, continue climb-in-hold to 4000. * Missed approach requires minimum climb of 410 feet per NM to 1900.
▼ ▲ Rwy 3 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase *LNAV Cat C visibility and LNAV Cat visibility to 1⅓ SM. Circling NA for Cat C southeast of Rwy 3-21.	≡ ⦿	

AWOS-3 119.175	LOUISVILLE APP CON 132.075 327.0	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

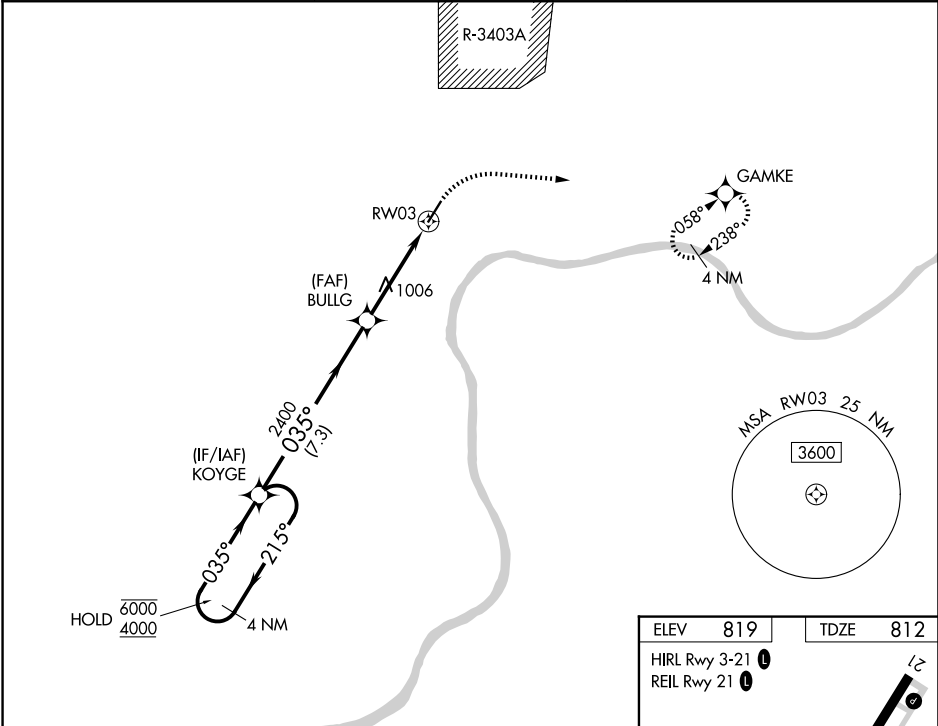

CATEGORY	A	B	C	D
LNAV MDA*	1260-¾	448 (500-¾)	1260-1 448 (500-1)	NA
LNAV MDA	1420-¾	608 (700-¾)	1420-1 608 (700-1)	NA
CIRCLING	1420-1	601 (700-1)	1440-1¾ 621 (700-1¾)	NA

