
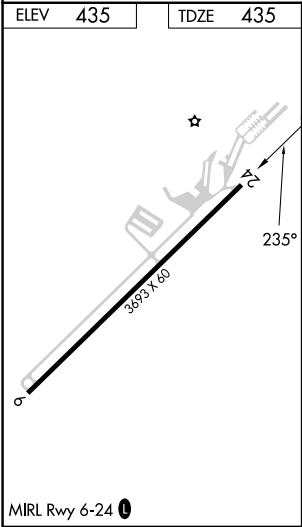


WAAS CH 70743 W24A	APP CRS 235°	Rwy Idg TDZE Apt Elev	3693 435 435
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24
NEW GARDEN (N57)

RNP APCH: ▼ ▲ NA Rwy 24 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when local altimeter not received, use New Castle altimeter setting and increase all MDA 80 feet. Increase LP Cat C visibility 3⁄8 SM, LNAV Cat C visibility 1⁄4 SM and Circling Cat C visibility 1⁄4 SM.		MISSED APPROACH: Climb to 2200 direct DELFA and hold.
PHILADELPHIA APP CON 124.35 319.15	CLNC DEL 125.6	UNICOM 123.05 (CTAF) 0

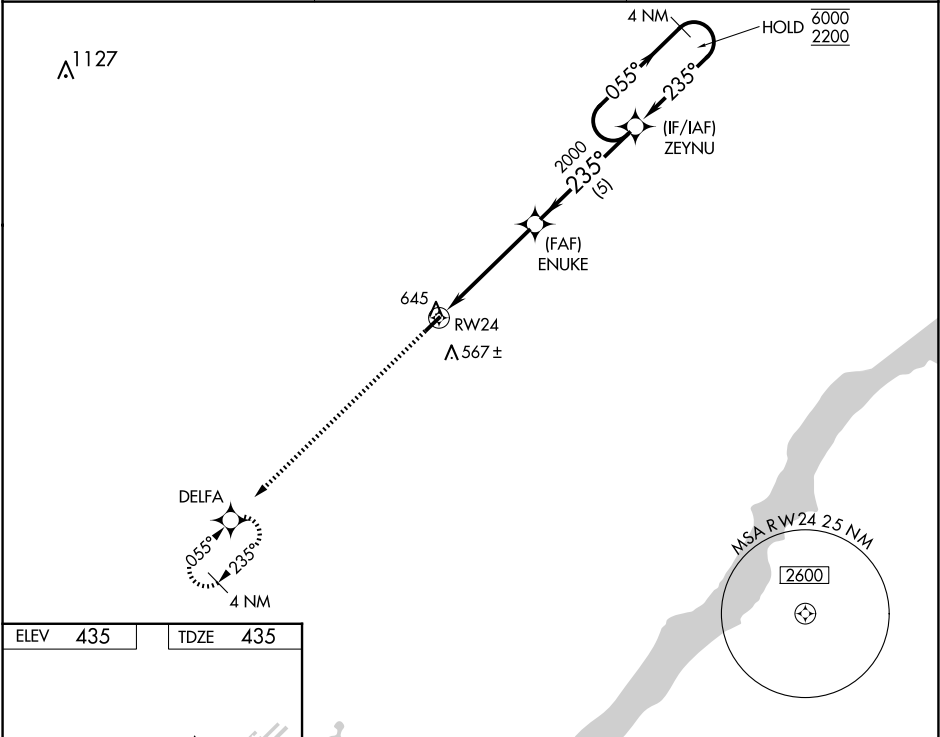

ELEV 435 TDZE 435		2200 DELFA		4 NM Holding Pattern	
235°		ENUKE		ZEYNU	
RW24		2000		055° 6000	
3.00° TCH 45		235°		2200	
4.8 NM		5 NM			
CATEGORY		A	B	C	D
LP MDA		880-1	445 (500-1)	880-1 1⁄8 445 (500-1 1⁄8)	NA
LNAV MDA		900-1	465 (500-1)	900-1 3⁄8 465 (500-1 3⁄8)	NA
CIRCLING		960-1	525 (600-1)	960-1 1⁄2 525 (600-1 1⁄2)	NA