

APP CRS
345°

Rwy Ldg
TDZE
246

Apt Elev
246

RNAV (GPS) RWY 35

BARNWELL RGNL (BNL)

RNP APCH - GPS.


▼

NA

VDP NA when using AGS altimeter setting. When local altimeter setting not received, use AGS altimeter setting and increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM. Circling Rwy 5, 23 NA at night.

MISSED APPROACH: Climb to 2200 direct FATSU and hold.

AWOS-3PT 119.775	JACKSONVILLE CENTER 132.925 363.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
---------------------	--------------------------------------	----------------	--------------------------

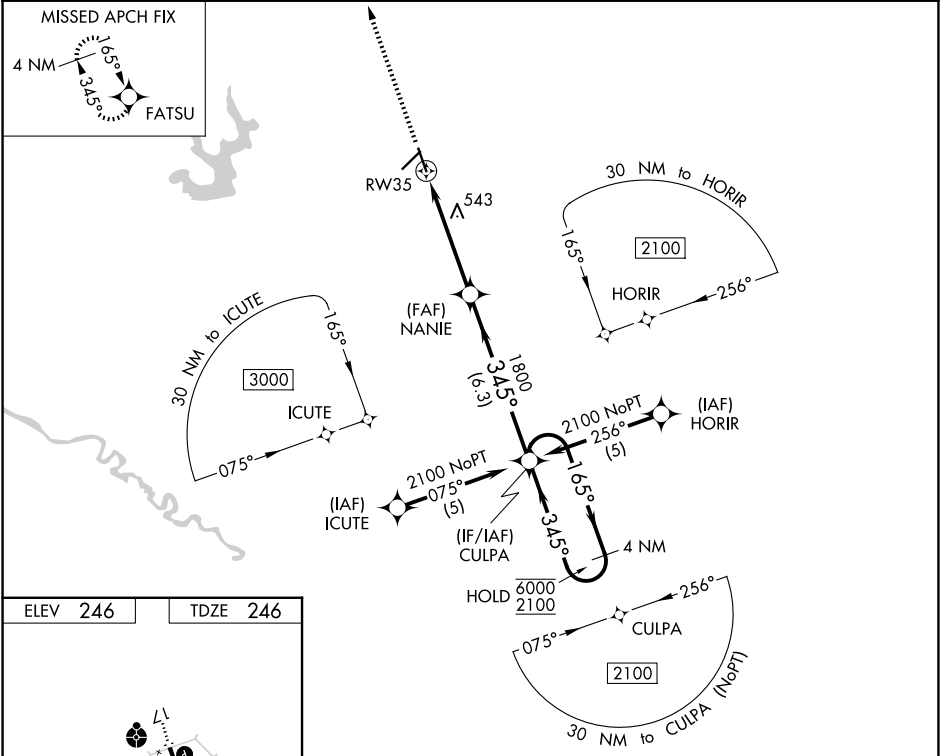

ELEV 246

TDZE 246

MIRL Rwy 17-35 0

345°

45° X 70

5119-1.00

35

32

41

2200	FATSU	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).			
		NANIE	CULPA	4 NM Holding Pattern	
1.8 NM to RW35		1800	345°	165°	6000 2100
1.8		2.9 NM	6.3 NM		
CATEGORY	A	B	C	D	
LNAV MDA	860-1	614 (700-1)	860-1¾ 614 (700-1¾)	860-2 614 (700-2)	
CIRCLING	860-1	614 (700-1)	900-1¾ 654 (700-1¾)	900-2 654 (700-2)	

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025