

BARTOW, FLORIDA

AL-5838 (FAA)

23278

WAAS CH 90511 W09A	APP CRS 091°	Rwy Idg 5000 TDZE 125 Apt Elev 125
--	------------------------	---


RNAV (GPS) RWY 9L
BARTOW EXEC(BOW)

RNP APCH.

T Rwy 9L helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 548 feet, LNAV/VNAV DA to 645 feet and all MDA 120 feet, increase LNAV Cat C and D visibility $\frac{1}{4}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct IVON and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

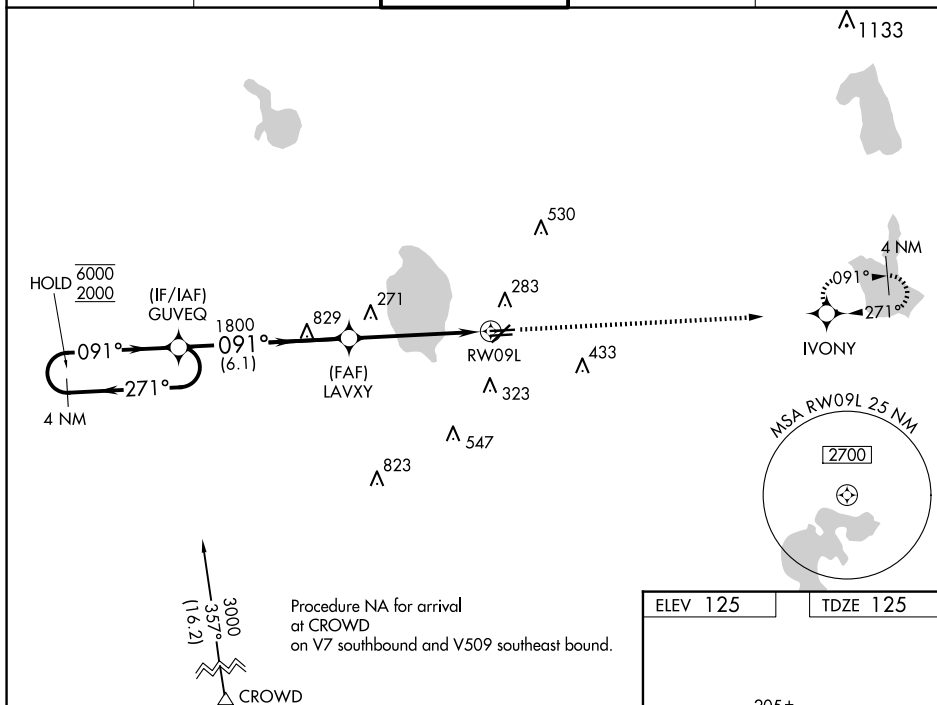

4 NM Holding Pattern

GUYEQ

LAVXY

1800

1800

*1.2 NM to RWY09L


RWY09L

GP 3.00° TCH 45

2000

$\star$ LNAV only.

CATEGORY	A	B	C	D
LPV DA		442- $1\frac{1}{4}$	317 (400- $1\frac{1}{4}$)	
LNAV/VNAV DA		539- $1\frac{1}{2}$	414 (500- $1\frac{1}{2}$)	
LNAV MDA	540-1	415 (500-1)	540- $1\frac{1}{4}$	415 (500- $1\frac{1}{4}$)

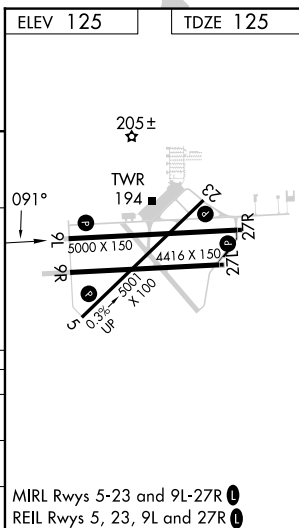

BARTOW, FLORIDA
Amdt 1D 07NOV19

27°57'N-81°47'W

BARTOW EXEC(BOW)
RNAV (GPS) RWY 9L

SE-3, 27 NOV 2025 to 25 DEC 2025