

25275

WAAS CH 82143 W18A	APP CRS 177°	Rwy Ldg TDZE Apt Elev	18L 6502 642 643	18R 5003 643 643
--	------------------------	-----------------------------	--	--

RNAV (GPS) RWY 18L
DENTON ENTERPRISE (DTO)

RNP APCH-GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -9°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats
 visibility to 3/4 SM, and LNAV Cats C and D to 1 SM

MALSR




MISSED APPROACH: Climb to 1900 then climbing right turn to 4000 direct GREGS and hold.

ATIS
119.325

LONE STAR APP CON
118.1 306.95

DENTON TOWER ★
119.95 (CTAF) L

GND CON
123.95

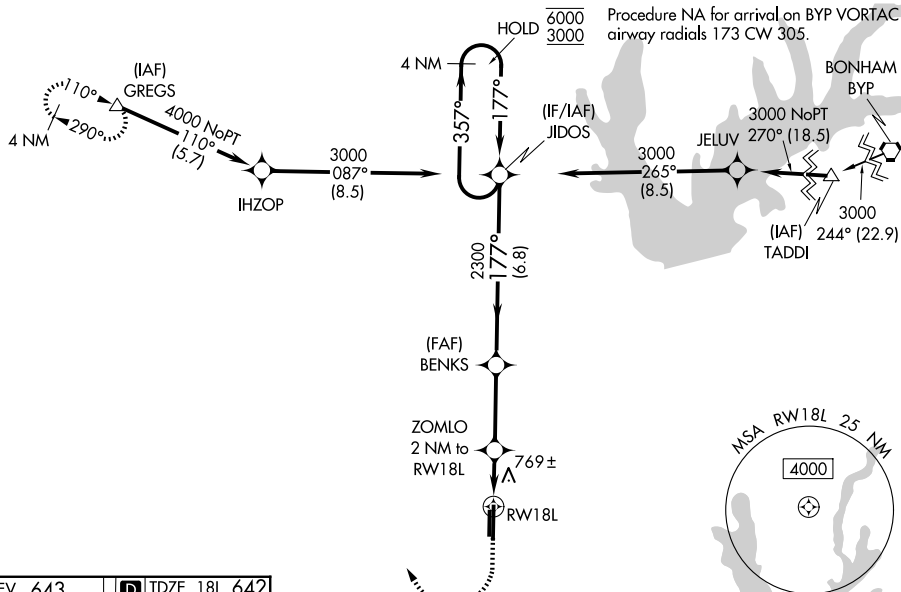

ELEV 643

177°

18L

18R

5003 X 75

7002 X 150

0.3% UP →

36L

36R

TWR

TDZE 18L 642

TDZE 18R 643

		GREGS 		4 NM Holding Pattern	
		ZOMLO 2 NM to RW18L		BENKS 2300	
1 NM to RW18L		1320		JIDOS 357° → 6000 ← 177° 3000	
1 NM		3.1 NM		6.8 NM	
CATEGORY DA		A		D	
LPV DA		842-½		200 (200-½)	
LNAV/ VNAV DA		950-½		308 (400-½)	
LNAV MDA		1020-½ 378 (400-½)		1020-¾ 378 (400-¾)	
SIDESTEP 18R		1100-1 457 (500-1)		1100-2 457 (500-2)	
CIRCLING		1100-1 457 (500-1) 1260-1 617 (700-1)		1380-2 737 (800-2) 1380-2¼ 737 (800-2¼)	

DENTON, TEXAS
Orig-A 22FEB24

33°12'N-97°12' W

DENTON ENTERPRISE (DTO)

RNAV (GPS) RWY 18L

SC-2, 27 NOV 2025 to 25 DEC 2025