

WAAS CH 72806 W18A	APP CRS 176°	Rwy Idg TDZE Apt Elev	6500 414 425
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18
ROSCOE TURNER (CRX)



RNP APCH-GPS.

Baro-VNAV NA when using Selmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Selmer altimeter setting. When local altimeter setting not received, use Selmer altimeter setting and increase LPV DA to 682 feet, increase LNAV/VNAV DA to 812 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ¾ SM and Circling visibility Cats C and D 1½ SM. For inop ALS when using Selmer altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV visibility Cats C and D to 1¼ SM.



MISSED APPROACH:
Climb to 3000 direct
WEDGO and hold.

AWOS-3PT 118.675	MEMPHIS CENTER 135.9 273.55	UNICOM 122.8 (CTAF) 0
----------------------------	---------------------------------------	---------------------------------

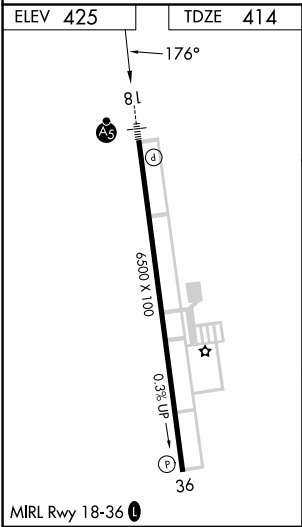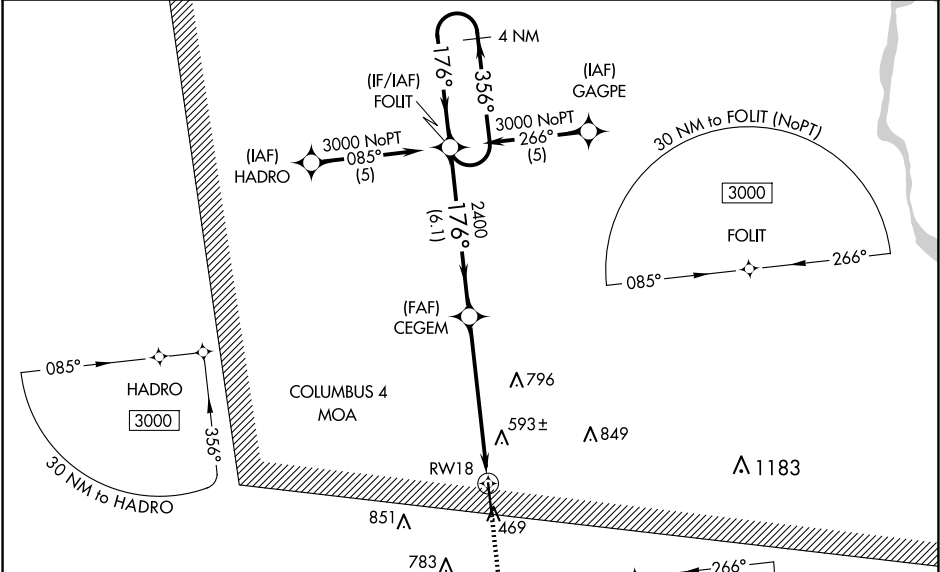

MISSED APCH FIX WEDGO 3000 176° 356° 4 NM				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50). 3000 WEDGO			
4 NM Holding Pattern 3000 356° 176° GP 3.00° TCH 46				FOLIT CEGEM 1.5 NM to RW18 2400 6.1 NM 4.5 NM 1.5 NM RW18			
CATEGORY	A	B	C	D			
LPV DA		614-½	200 (200-½)				
LNAV/VNAV DA		744-½	330 (400-½)				
LNAV MDA	940-½	526 (600-½)	940-1	526 (600-1)			
CIRCLING	940-1	515 (600-1)	1100-2 675 (700-2)	1160-2¼ 735 (800-2¼)			

SC-4, 27 NOV 2025 to 25 DEC 2025

SC-4, 27 NOV 2025 to 25 DEC 2025