

WAAS CH 97708 W09A	APP CRS 090°	Rwy Idg 4549 TDZE 669 Apt Elev 669
--	------------------------	---


RNAV (GPS) RWY 9
CHARLEVOIX MUNI (CVX)

RNP APCH - GPS.


T Circling NA to Rwy 4 and 22. Baro-VNAV NA when using Pellston altimeter setting.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
 When local altimeter setting not received, use Pellston altimeter setting: increase LPV DA to 986 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1270 feet and all visibilities ¼ SM; increase all MDA 80 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
COKOS and hold.


AWOS-3P 120.0	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.8 (CTAF) 0
-------------------------	---	--

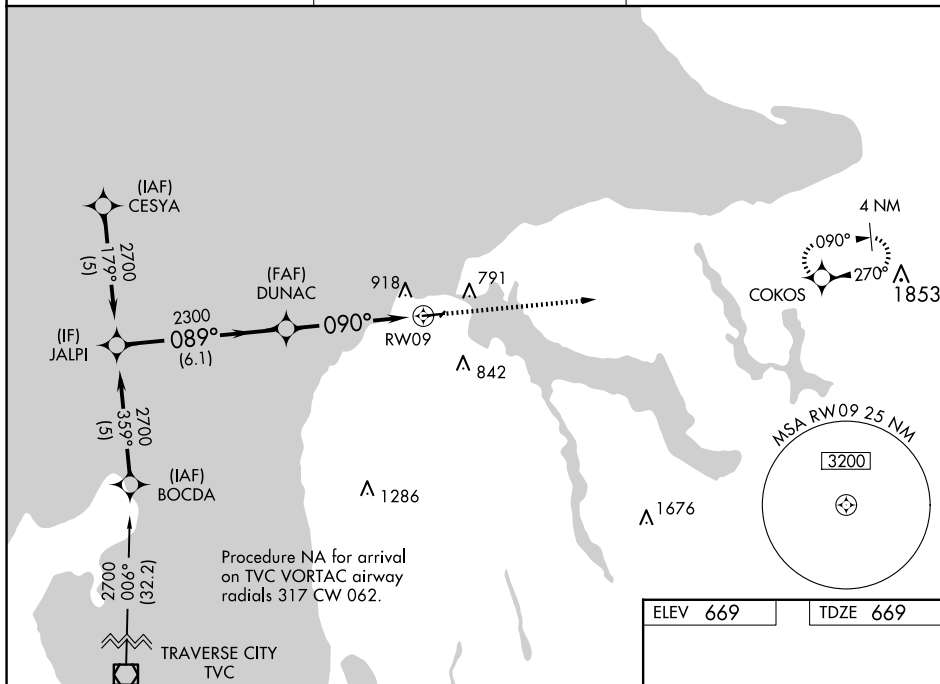

ELEV 669	TDZE 669
----------	----------

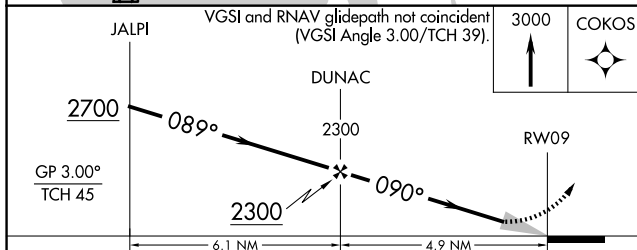

CATEGORY		A	B	C	D
LPV	DA	919- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV/ VNAV	DA	1203-1 $\frac{1}{2}$ 534 (600-1 $\frac{1}{2}$)			
LNAV	MDA	1160-1	491 (500-1)	1160-1 $\frac{3}{8}$	491 (500-1 $\frac{3}{8}$)
CIRCLING		1280-1	611 (700-1)	1280-1 $\frac{3}{4}$ 611 (700-1 $\frac{3}{4}$)	1360-2 $\frac{1}{4}$ 691 (700-2 $\frac{1}{4}$)



REIL Rwy 9 and 27 (L)
MIRL Rwy 9-27 (L)