

DALLAS FOUR DEPARTURE
(DALL4.TTT) 27NOV25LANCASTER, TEXAS
LANCASTER RGNL (LNC)LONE STAR DEP CON
125.2 343.65


RADAR and DME required.

NOTE: BELCHER Transition: For aircraft inbound to the JAN, MLU, and SHV terminal areas only.
NOTE: SOLD0 Transition: ATC assigned.

**TOP ALTITUDE:
ASSIGNED BY ATC**


BONHAM
114.6 BYP 
Chan 93

MAVERICK
113.1 TTT 
Chan 78

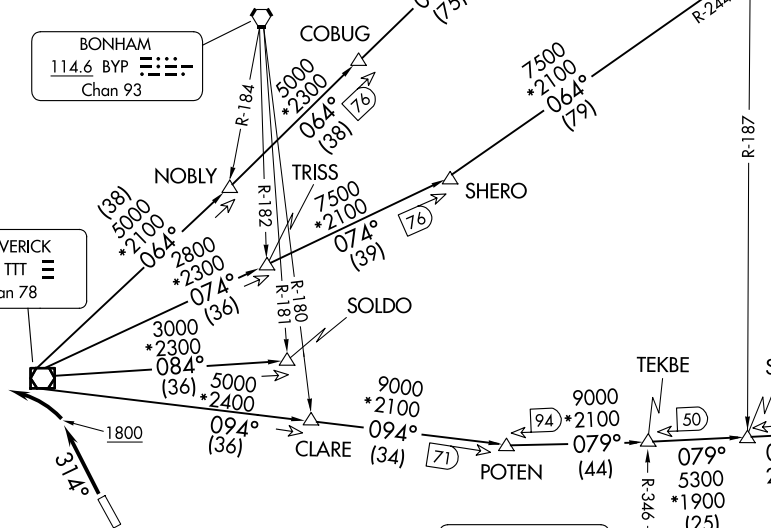**TAKEOFF MINIMUMS**

Rwy 13: Standard.

Rwy 31: 300-1¼ or standard with a minimum climb of 210'/NM to 800, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1300' prior to DER.



(*CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

DALLAS FOUR DEPARTURE
(DALL4.TTT) 25331

AL-5936 (FAA)

LANCASTER RGNL (LNC)
LANCASTER, TEXAS

DEPARTURE ROUTE DESCRIPTION	
<u>TAKEOFF RUNWAY 31</u>: Climb on heading 314° to 1800 before turning left. Fly assigned heading for RADAR vectors to appropriate route. Maintain ATC assigned altitude. <u>BELCHER TRANSITION (DALL4.EIC)</u>: From over TTT VOR/DME on TTT R-094 to POTEN, then on EIC R-259 to EIC VORTAC. <u>LITTLE ROCK TRANSITION (DALL4.LIT)</u>: From over TTT VOR/DME on TTT R-064 to ORTRO, then on LIT R-237 to LIT VORTAC. <u>SOLDO TRANSITION (DALL4.SOLD0)</u>: From over TTT VOR/DME on TTT R-084 to SOLD0. <u>TEXARKANA TRANSITION (DALL4.TXK)</u>: From over TTT VOR/DME on TTT R-074 to SHERO, then on TXK R-244 to TXK VORTAC.	

SC-2, 27 NOV 2025 to 25 DEC 2025

SC-2, 27 NOV 2025 to 25 DEC 2025