
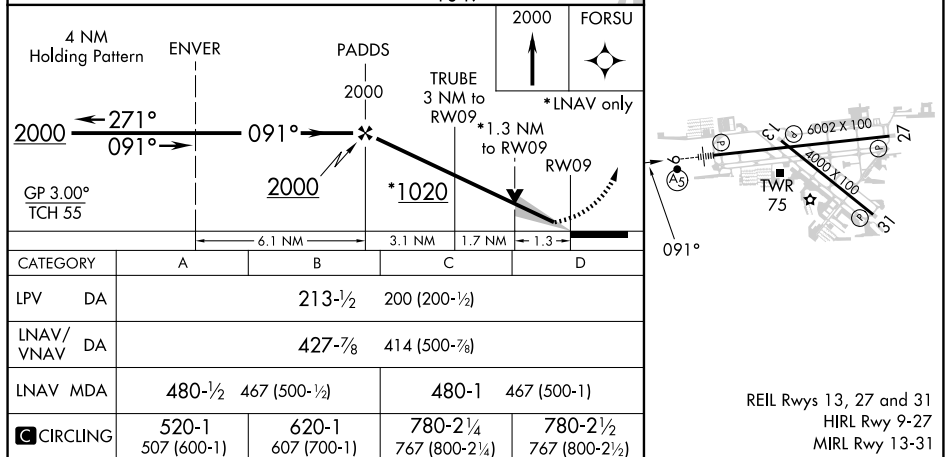


WAAS CH 48919 W09A	APP CRS 091°	Rwy Idg 6002 TDZE 13 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 9
FORT LAUDERDALE EXEC (FXE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). When local altimeter setting not received, use Fort Lauderdale/Hollywood
A Intl altimeter setting and increase LPV DA to 231; LNAV/VNAV DA to 445. Increase all MDA 20 feet, increase LNAV/VNAV all Cats visibility to 1. Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. DME/DME RNP-0.3 NA.

ATIS 119.85	MIAMI APP CON 119.7 306.3	EXECUTIVE TOWER 120.9 239.3	GND CON 121.75	CLNC DEL 127.95
----------------	------------------------------	--------------------------------	-------------------	--------------------

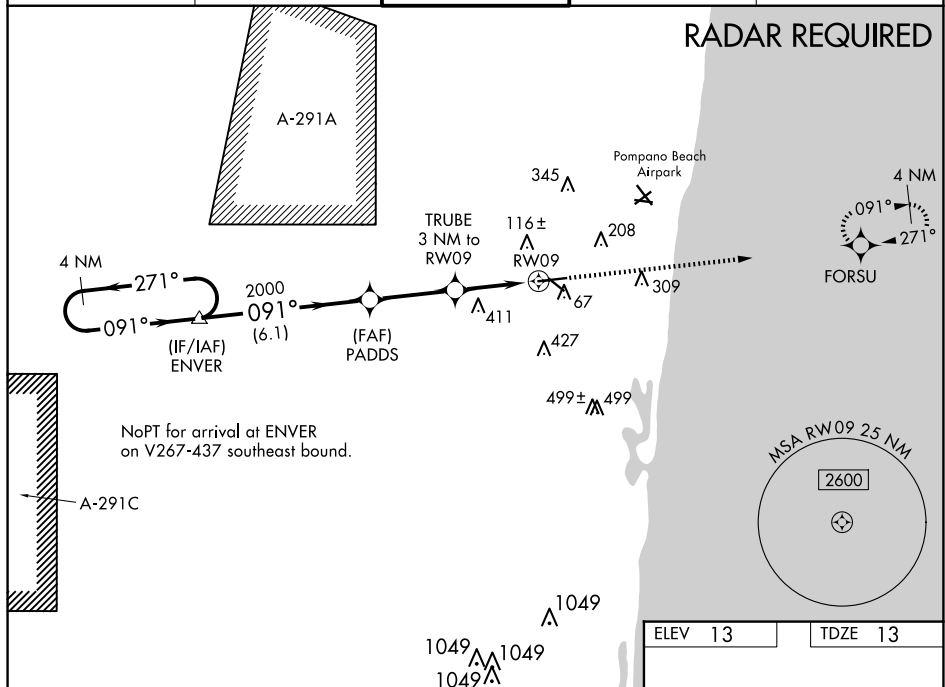

CATEGORY		A	B	C	D
LPV	DA	213- ¹ / ₂		200 (200- ¹ / ₂)	
LNAV/ VNAV	DA	427- ⁷ / ₈		414 (500- ⁷ / ₈)	
LNAV	MDA	480- ¹ / ₂ 467 (500- ¹ / ₂)		480-1 467 (500-1)	
 CIRCLING		520-1 507 (600-1)	620-1 607 (700-1)	780-2 ¹ / ₄ 767 (800-2 ¹ / ₄)	780-2 ¹ / ₂ 767 (800-2 ¹ / ₂)