


WAAS CH 72715 W33A	APP CRS 327°	Rwy Idg TDZE Apt Elev	4201 322 322
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 33

SKYHAVEN (DAW)

RNP APCH - GPS.	ODALS	MISSED APPROACH: Climb to 3800 direct TRASS and hold, continue climb-in-hold to 3800.
Inop table does not apply to LPV and LNAV/VNAV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV visibility Cat C to 1½ SM.		

ASOS 135.275	BOSTON APP CON 125.05 269.4	UNICOM 122.7 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

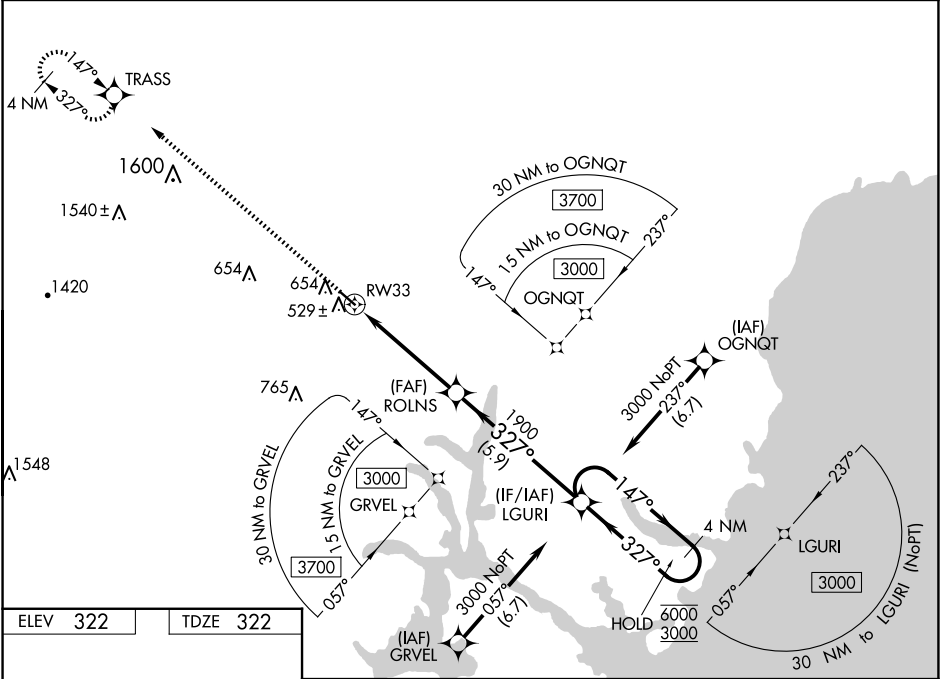

ELEV 322

TDZE 322

3800 TRASS

↑

4201 X75

0.5% UP

33

327°

3800 TRASS

↑

4 NM Holding Pattern

LGURI

147° → 6000

← 327° 3000

GP 3.00°

TCH 43

1.3 NM

3.5 NM

5.9 NM

CATEGORY	A	B	C	D
LPV DA	572-¾	250 (300-¾)		NA
LNAV/VNAV DA	699-1	377 (400-1)		NA
LNAV MDA	780-¾	458 (500-¾)	780-1⅛ 458 (500-1⅛)	NA
CIRCLING	960-1	638 (700-1)	960-1¾ 638 (700-1¾)	NA