



WAAS CH 97605 W07A	APP CRS 073°	Rwy Idg 5000 TDZE 891 Apt Elev 891
--	------------------------	---

RNAV (GPS) RWY 7
OCONEE COUNTY RGNL (CEU)


V Baro-VNAV NA when using Anderson altimeter setting. For uncompensated Baro-VNAV systems, **A** LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anderson altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV and LNAV/VNAV Cats A and B, and LNAV Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
GUTQO and hold.

ASOS 119.275	GREER APP CON ★ 118.8 270.275	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

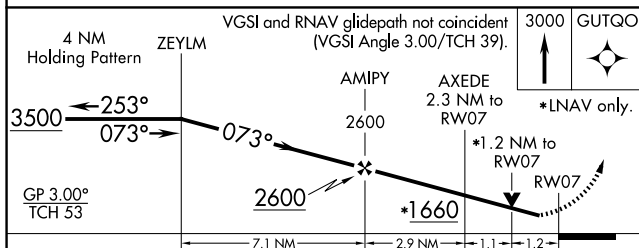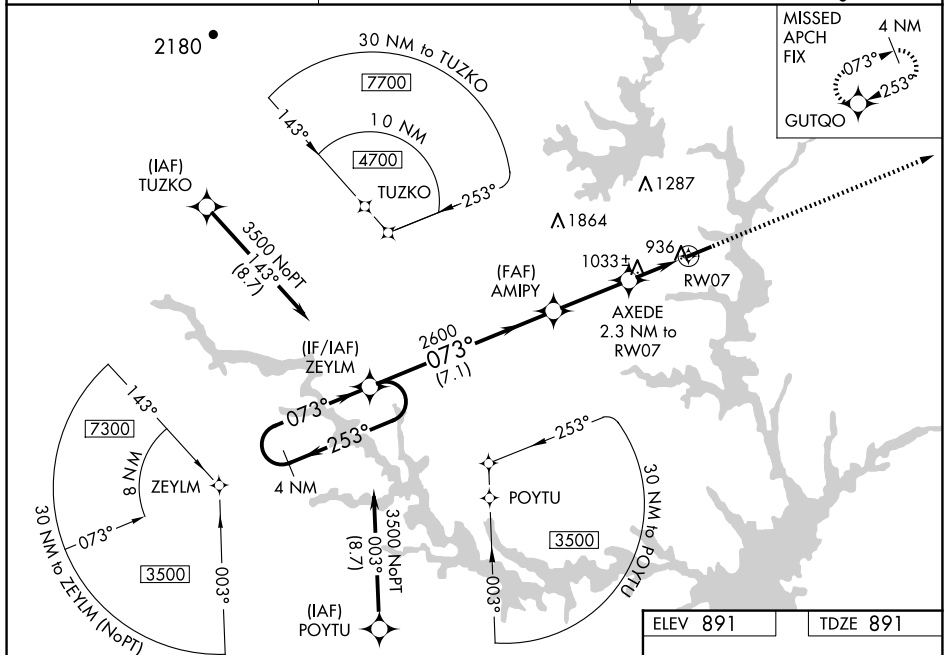

CATEGORY		A	B	C	D
LPV	DA	1146- $\frac{3}{4}$	255 (300- $\frac{3}{4}$)	1146-1 255 (300-1)	NA
LNAV/ VNAV	DA	1144- $\frac{3}{4}$	253 (300- $\frac{3}{4}$)	1144-1 253 (300-1)	NA
LNAV	MDA	1300-1	409 (500-1)	1300-1 $\frac{1}{8}$ 409 (500-1 $\frac{1}{8}$)	NA
 CIRCLING		1300-1 409 (500-1)	1360-1 469 (500-1)	1640-2 $\frac{1}{4}$ 749 (800-2 $\frac{1}{4}$)	NA

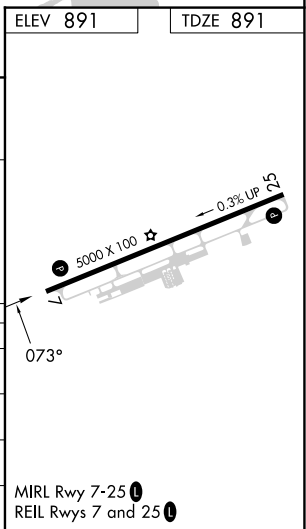

OCONEE COUNTY RGNL (CEU)
RNAV (GPS) RWY 7