

WAAS CH 70331 W35A	APP CRS 352°	Rwy Idg 5599 TDZE 2426 Apt Elev 2430
--	------------------------	---

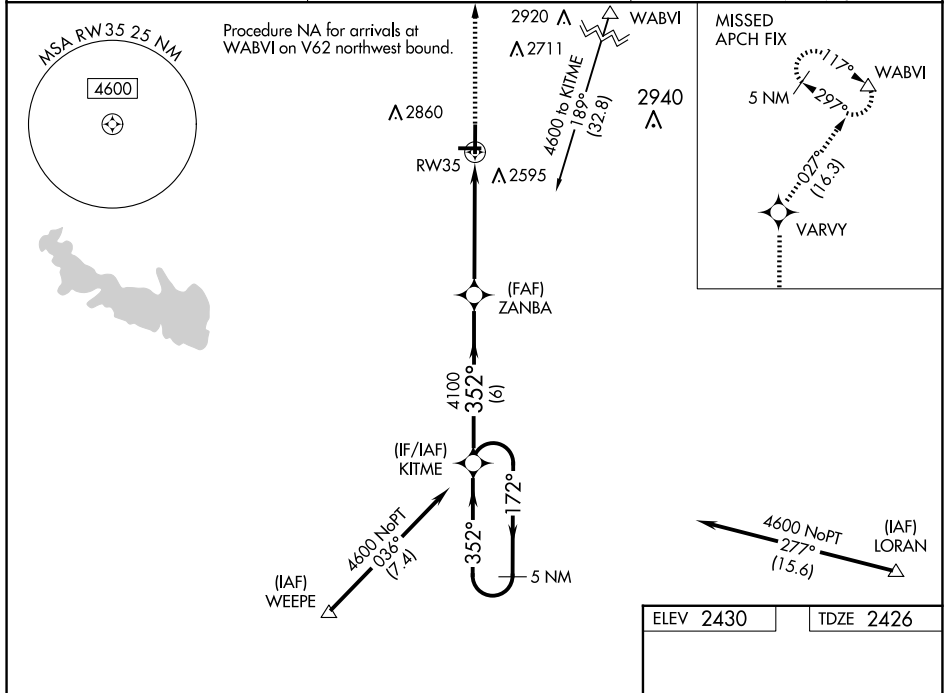
RNAV (GPS) RWY 35
WINSTON FLD (SNK)

RNP APCH-GPS

T Baro-VNAV NA when using Sweetwater altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. VDP NA with Sweetwater altimeter setting. When local altimeter setting not received, use Sweetwater altimeter setting and increase LPV DA to 2698 and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 2748 and all visibilities $\frac{3}{8}$ SM; increase all MDAs 80 feet and LNAV and Circling visibility Cat C $\frac{1}{4}$ SM. Circling NA to Rwys 8 and 26. Circling Rwy 17 NA at night.

MISSED APPROACH:
Climb to 5000 direct VARVY
and on track 027° to WABVI
and hold, continue
climb-in-hold to 6000

AWOS-3 119.925	FORT WORTH CENTER 127.45 290.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

[illegible]