


LOC/DME I-BXN 111.9 Chan 56	APP CRS 356°	Rwy Ldg 360 36R TDZE 588 581 Apt Elev 606 606	ILS or LOC RWY 36L DALLAS-FORT WORTH INTL (DFW)
---	------------------------	---	--

⚠ Inop table does not apply to Sidestep 36R. Simultaneous approach authorized with Rwy 35L/C/R. DME or RADAR required. For inop ALS, increase S-LOC 36L Cat C and D visibility to 1½ SM. For inop ALS, increase CIRIS fix minimums (DME required) S-LOC 36L Cats C and D visibility to RVR 5500.

Rwys 36L/R
MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 on heading 315° and CVE VOR/DME R-298 to KAGLE INT/ CVE VOR/DME 39 DME and hold.

D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 118.425	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25	CPDLC
--	-------------------------------------	---	---	---------------------------	-------

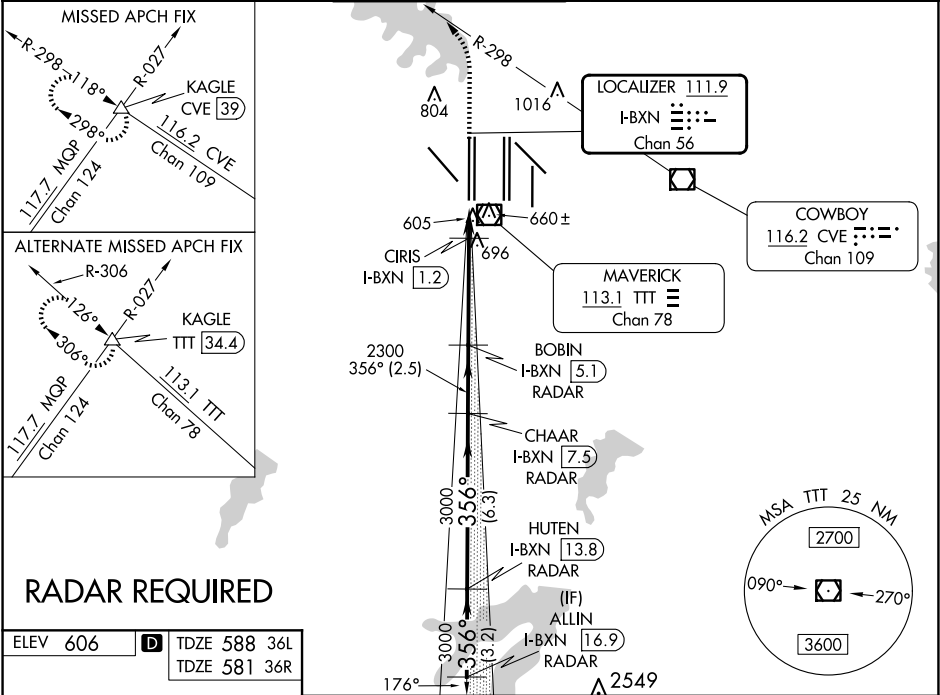

RADAR REQUIRED

ELEV 606 **D** TDZE 588 36L
TDZE 581 36R

HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

1100 ↑	3000 hdg 315°	CVE R-298	KAGLE △	BOBIN I-BXN [5.1] RADAR	CHAAR I-BXN [7.5] RADAR	HUTEN I-BXN [13.8] RADAR	ALLIN I-BXN [16.9] RADAR