


WAAS CH 82041 W10A	APP CRS 096°	Rwy Idg 4201 TDZE 1089 Apt Elev 1090
--	------------------------	---

RNAV (GPS) RWY 10

NEW CASTLE HENRY COUNTY MARLATT FLD (UWL)

RNP APCH - GPS.	▼ Rwy 10 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AID altimeter setting. When local altimeter setting not received, use Anderson altimeter setting; increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1424 feet; increase all MDAs 80 feet, LNAV visibility Cat C/D $\frac{3}{4}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM.	MISSED APPROACH: Climb to 3000 direct TASUY and hold.
-----------------	---	--

AWOS-3 132.375	INDIANAPOLIS APP CON 135.45 317.8	UNICOM 123.05 (CTAF) 0
--------------------------	---	----------------------------------

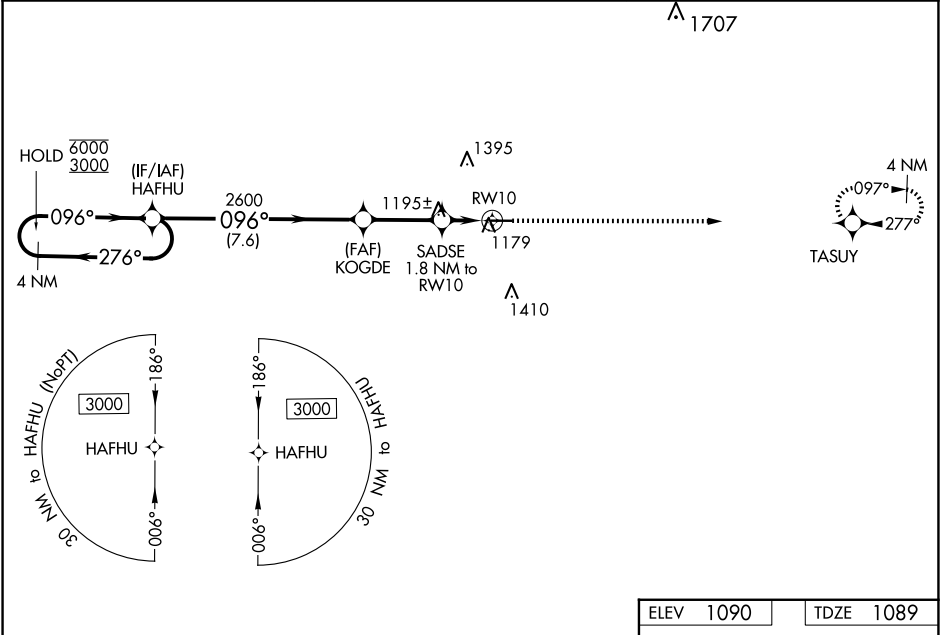

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 46).		3000 TASUY	
GP 3.00° TCH 46		2600		1680	
7.6 NM		2.8 NM		0.8 NM	
1.1 NM		1.1 NM		1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1339-1 250 (300-1)				
LNAV/VNAV DA	1355-1 266 (300-1)				
LNAV MDA	1460-1 371 (400-1)				
CIRCLING	1520-1 430 (500-1)	1540-1 450 (500-1)	1720-1 $\frac{3}{4}$ 630 (700-1 $\frac{3}{4}$)	1720-2 630 (700-2)	
					MIRL Rwy 10-28 0 REIL Rwy 10 and 28 0

RNAV (GPS) RWY 10

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025