

BENNETTSVILLE, SOUTH CAROLINA

AL-6047 (FAA)

24305

WAAS CH 42818 W25A	APP CRS 246°	Rwy Idg 5003 TDZE 147 Apt Elev 147
--	------------------------	---

RNAV (GPS) RWY 25

MARLBORO COUNTY JETPORT/H E AVENT FLD (BBP)

RNP APCH.

V Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. Rwy 25 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 61 feet and MDA 80 feet. Increase LPV all Cats, and LNAV Cat C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 2500 direct LONCI and hold.

AWOS-3PT 123.825	FLORENCE APP CON ★ 118.6 341.7	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

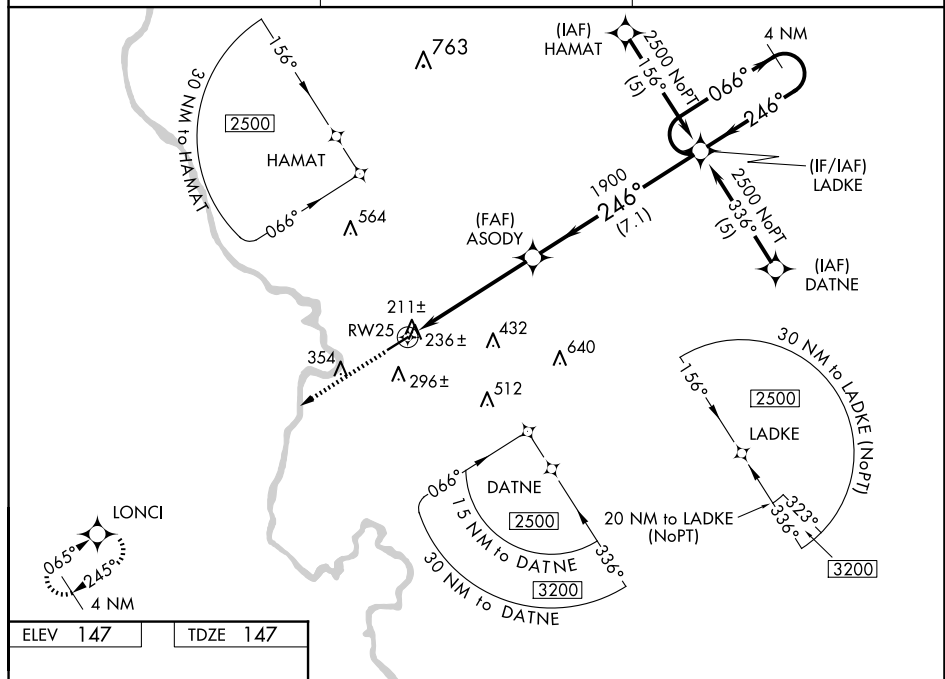


Figure 1-1 illustrates a VGS (Vertical Guidance Segment) for a 4 NM Holding Pattern. The diagram shows a holding pattern with a 4 NM radius. The VGS is defined by a 246° heading and a 1900 ft altitude. The VGS is divided into three segments: A (5.3 NM), B (7.1 NM), and C (4.0 NM). The VGS is defined by a 246° heading and a 1900 ft altitude. The VGS is defined by a 246° heading and a 1900 ft altitude.

BENNETTSVILLE, SOUTH CAROLINA

Amdt 1B 07NOV19

MARLBORO COUNTY JETPORT/H E AVENT FLD (BBP)

34°37'N-79°44'W

RNAV (GPS) RWY 25

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025