

LOC/DME I-CFU	APP CRS	Rwy Ldg	5500
108.3	331°	TDZE	217
Chan 20		Apt Elev	236

ILS or LOC RWY 33

RICHMOND EXEC/CHESTERFIELD COUNTY (F'CI)

T



A

When local altimeter setting not received, use RIC altimeter setting and increase S-ILS 33 DA to 454 feet; increase all MDAs 40 feet and S-LOC 33 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. VDP NA when using RIC altimeter setting.

MALSR

MISSED APPROACH: Climb to 800, then climbing left turn to 2000 on heading 148° and on RIC VORTAC R-223 to MATOX INT/RIC 16.3 DME and hold, continue climb-in-hold to 2000.

AWOS-3PT	POTOMAC APP CON	CLNC DEL	UNICOM
128.625	126.75 307.2	124.6	123.05 (CTAF) 0

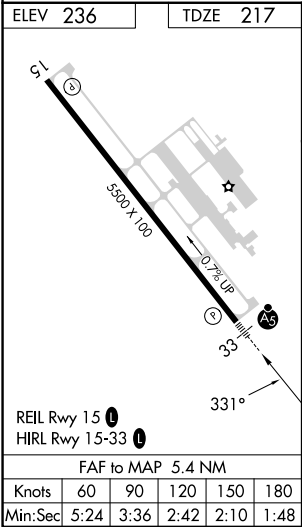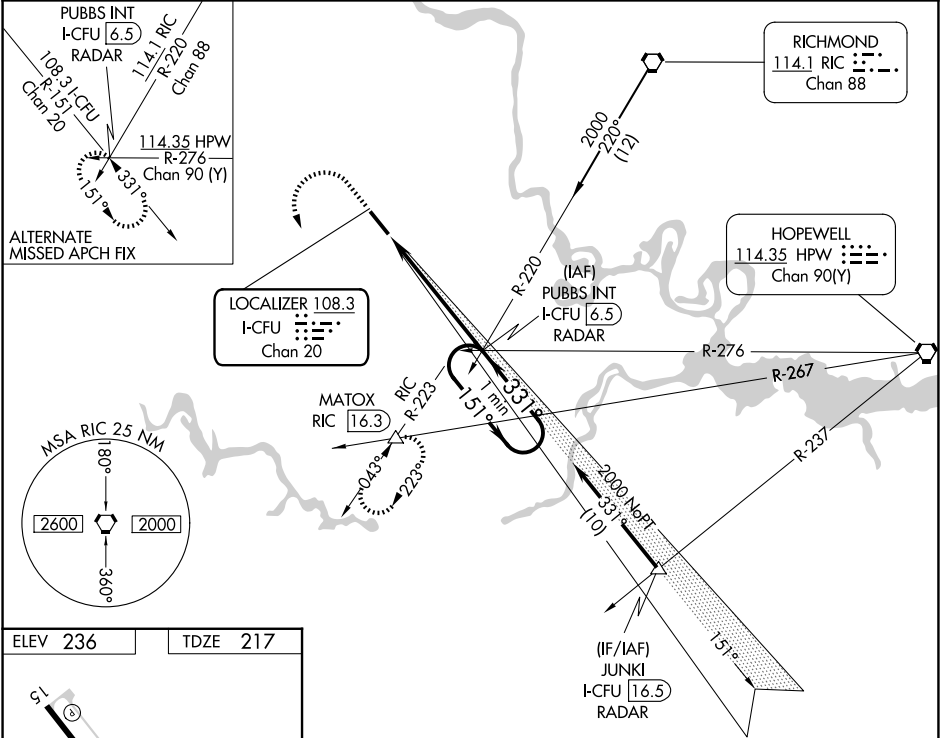

800	2000	RIC R-223	MATOX	PUBBS INT I-CFU (6.5) RADAR	One Minute Holding Pattern
hdg 148°					
*LOC only.	*I-CFU				
I-CFU (1.1)	I-CFU (2.4)				
151°	331°				2000
1.3 NM	4.1 NM				GS 3.00° TCH 49
CATEGORY	A	B	C	D	
S-ILS 33		417-½	200 (200-½)		
S-LOC 33	660-½	443 (500-½)	660-¾	443 (500-¾)	
CIRCLING	720-1	820-1	820-1½	1020-2½	
	484 (500-1)	584 (600-1)	584 (600-1½)	784 (800-2½)	