

APP CRS
337°

Rwy Idg
TDZE
Apt Elev

4000
425
430

RNAV (GPS) RWY 34

PLEASANTON MUNI (P/E/Z)

RNP APCH.


▼

▲

When local altimeter setting not received, use Kelly Fld altimeter setting and increase all MDA 100 feet. Procedure NA at night. Rwy 34 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct MUXUE and via 325° track to SOMER and hold.

AWOS-3 118.575	SAN ANTONIO APP CON 118.05 353.5	CLNC DEL 121.375	UNICOM 122.7 (CTAF) 0
-------------------	-------------------------------------	---------------------	--------------------------

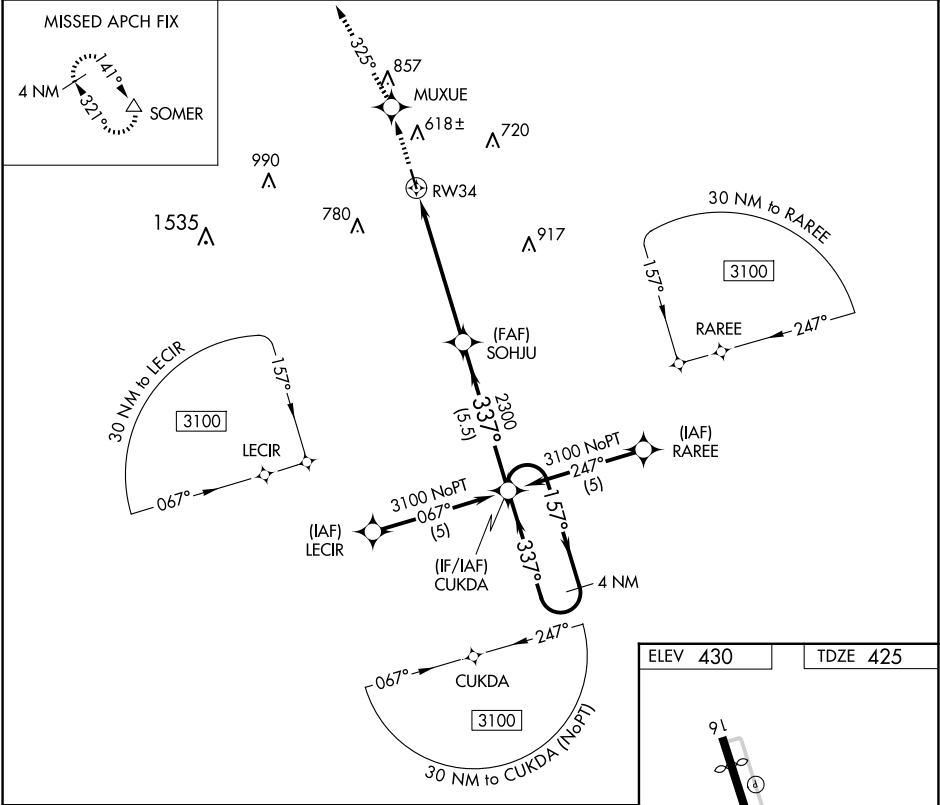

3000

MUXUE

325° tr

SOMER

CUKDA

4 NM Holding Pattern

157°

337°

3100

SOHJU

337°

2300

3.05° TCH 35

RW34

5.8 NM

5.5 NM

CATEGORY	A	B	C	D
LNAV MDA	960-1	535 (600-1)	NA	NA
CIRCLING	1020-1	590 (600-1)	NA	NA

ELEV 430

TDZE 425

91

34

337° to RW34

MIRL Rwy 16-34 0