
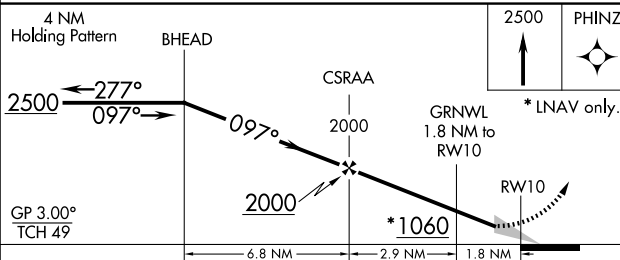


RNAV (GPS) RWY 10
THOMSON/McDUFFIE COUNTY (HQU)

T Baro-VNAV NA when using Daniel Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). When local altimeter setting not received, use Daniel Field altimeter setting: increase LPV DA to 917 feet and visibility ½ SM, increase LNAV/VNAV DA to 1028 feet; increase all MDAs 80 feet, and visibility LNAV Cats C/D ½ SM, and Circling Cat C ¼ SM, and Circling Cat D ½ SM.

MISSED APPROACH:
Climb to 2500 direct
PHINZ and hold.

UNICOM
122.8 (CTAF) **L**

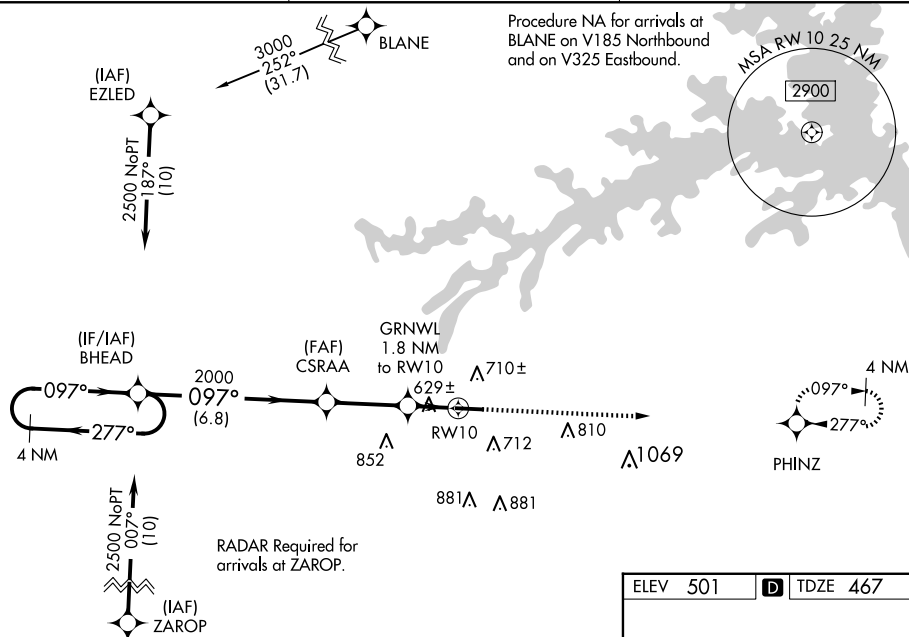

CATEGORY	A	B	C	D
LPV DA	850-1¼		383 (400-1¼)	
LNAY/ VNAV DA	961-1½		494 (500-1½)	
LNAY MDA	880-1	413 (400-1)	880-1¼	413 (400-1¼)
 CIRCLING	1060-1 559 (600-1)	1080-1 579 (600-1)	1160-1¾ 659 (700-1¾)	1240-2¼ 739 (800-2¼)

HIRL Rwy 10-28 **L**