


24305

RNAV (GPS) RWY 28


▼ Baro-VNAV NA when using Daniel Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Daniel Field altimeter setting: increase LPV DA to 854 feet and visibility Cats A/B ½ SM, increase LNAV/VNAV DA to 877 feet; increase all MDAs 80 feet and increase visibility LNAV Cats C/D and Circling Cat C ¼ SM, and Circling Cat D ½ SM. Rwy 28 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct BHEAD and hold.

AWOS-3 120.625	AUGUSTA APP CON ★ 124.45 270.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

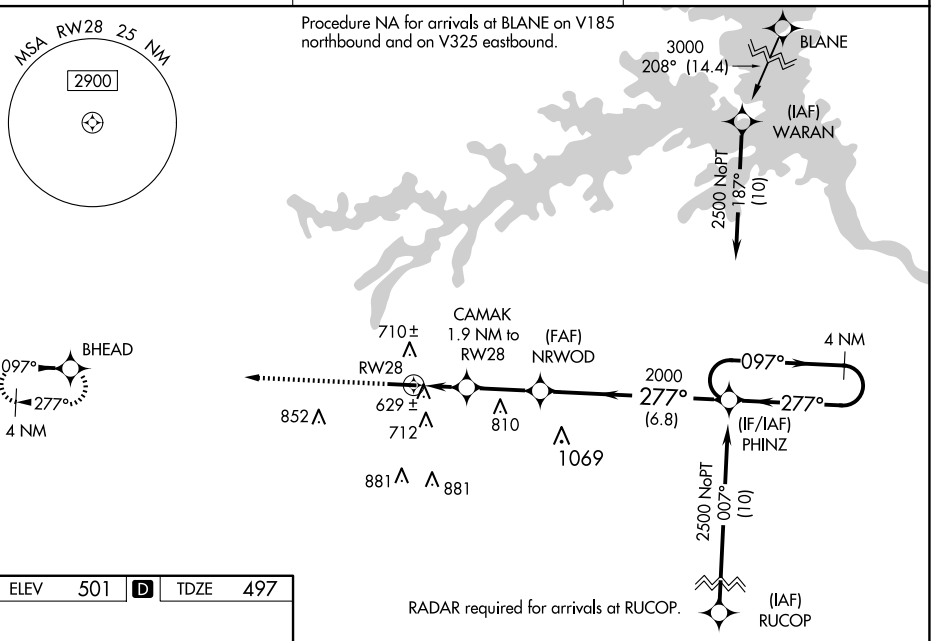

ELEV	501	D	TDZE	497
------	-----	----------	------	-----



VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.50/TCH 50).

4 NM Holding Pattern

PHINZ

097° → 2500

← 277°

NRWOD

CAMAK
1.9 NM to RW28

RW28

*1160

2000

GP 3.00°
TCH 60

CATEGORY	A	B	C	D
LPV DA	787- $\frac{7}{8}$	290 (300- $\frac{7}{8}$)	787-1	290 (300-1)
UNAV/ UNAV	DA 810-1 313 (400-1)			
UNAV MDA	880-1	383 (400-1)	880-1 $\frac{1}{8}$	383 (400-1 $\frac{1}{8}$)
C CIRCLING	1060-1 559 (600-1)	1080-1 579 (600-1)	1200-2 699 (700-2)	1240-2 $\frac{1}{4}$ 739 (800-2 $\frac{1}{4}$)

THOMSON/McDUFFIE COUNTY (HQU)
RNAV (GPS) RWY 28

SE-4, 27 NOV 2025 to 25 DEC 2025