


▼

▲

Visibility reduction by helicopters NA. When local altimeter setting not received, use Daniel Field altimeter setting and increase all MDAs 80 feet and visibility Cat C ¼ SM and Cat D ½ SM.

MISSED APPROACH:
Climbing right turn to 2400
direct IRQ VORTAC and hold.

AWOS-3 120.625	AUGUSTA APP CON ★ 124.45 270.3	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------------	--------------------------

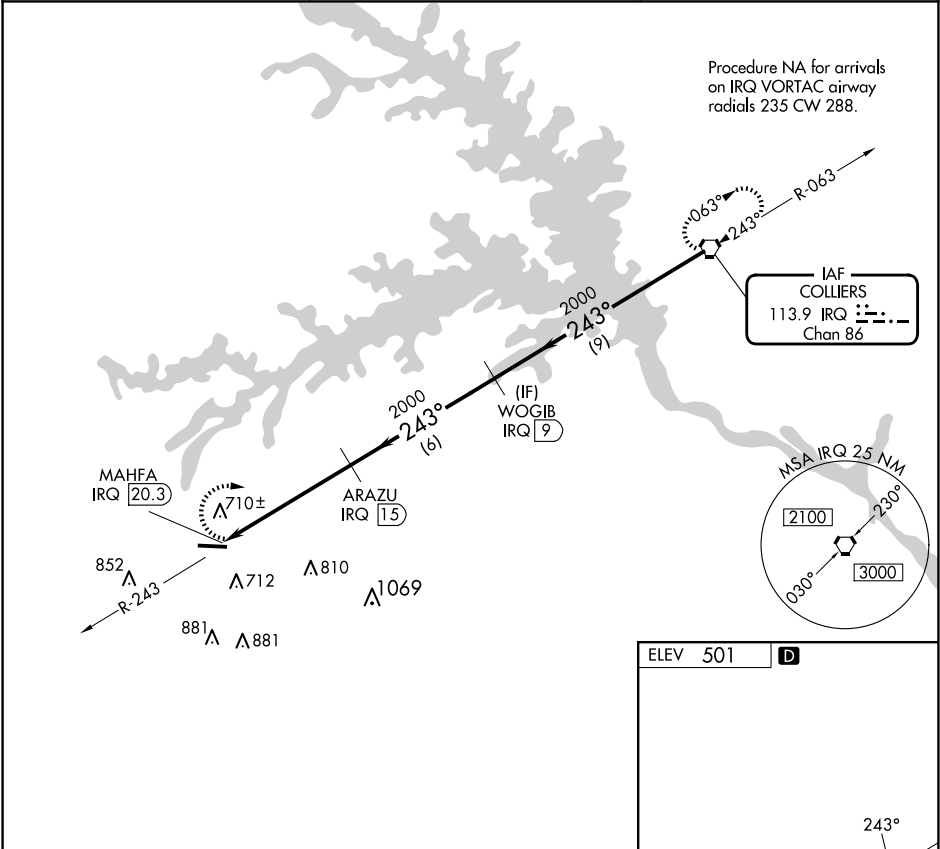

2400	IRQ			
		MAHFA IRQ 20.3	ARAZU IRQ 15	WOGIB IRQ 9
				IRQ VORTAC
		2000	2000	2000
		5.3 NM	6 NM	9 NM
CATEGORY	A	B	C	D
CIRCLING	1060-1 559 (600-1)	1080-1¼ 579 (600-1¼)	1160-1¾ 659 (700-1¾)	1240-2¼ 739 (800-2¼)

