


WAAS CH 40215 W21A	APP CRS 205°	Rwy Idg 5190 TDZE 194 Apt Elev 198
--	------------------------	---

RNAV (GPS) RWY 21
COLUMBIA COUNTY (1B1)

T Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 14°C (58°F). Rwy 21 helicopter visibility reduction below 1 SM NA. DME/DME RNP -0.3 NA. Straight-In Rwy 21 and Circling Rwy 21 NA at night. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 638 feet and visibility to 1½ SM all Cats, LNAV/VNAV DA to 709 feet and visibility to 1½ SM all Cats; increase all MDA 80 feet, LNAV Cat C/D visibility to 1¾ SM, Circling Cat C to 2¼ SM, and Cat D to 3 SM.

MISSED APPROACH:
Climb to 3200 direct
KROWL and hold,
continue climb-in-hold
to 3200.

AWOS-3 133.525	ALBANY APP CON 132.825 307.2	UNICOM 123.05 (CTAF) 0
--------------------------	--	---

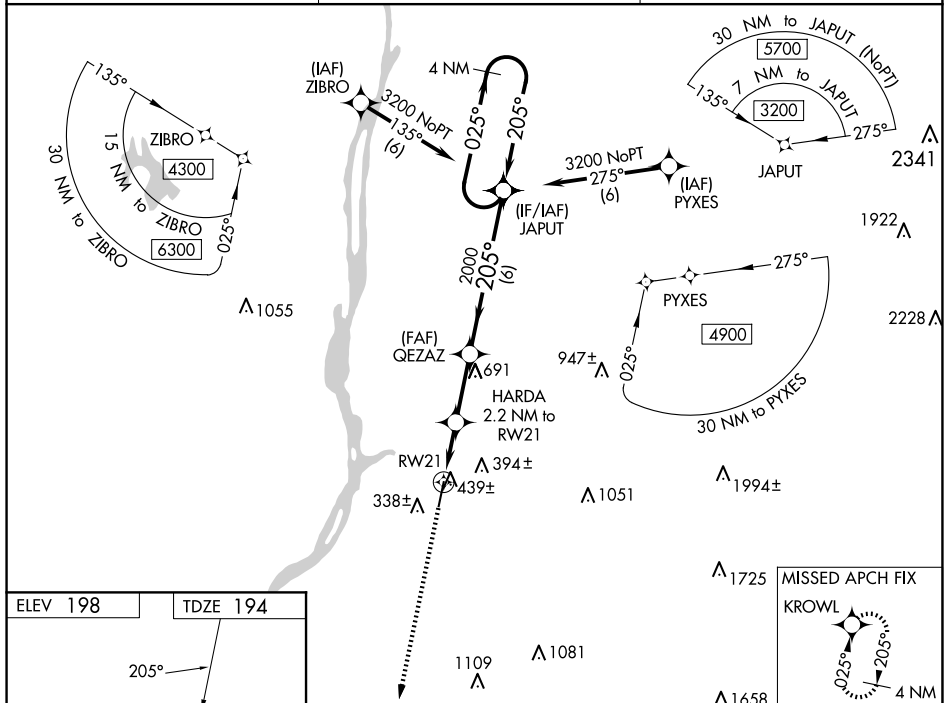

MIRL Rwy 3-21 **L**
REIL Rwy 3 and 21 **L**

Diagram illustrating the RNAV glidepath for RW21. The glidepath starts at 3200 feet, descends at 205 degrees to 2000 feet, then ascends at 025 degrees to 3200 feet. Key points include RW21 (2.2 NM to 3200), HARDA (2.2 NM to RW21), QEZAZ (2000 feet), and JAPUT. The diagram also shows the VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.52/TCH 41).

COLUMBIA COUNTY (1B1)
RNAV (GPS) RWY 21