

APP CRS
280°

Rwly Idg
TDZE
Apt Elev

3803
422
424

RNAV (GPS) RWY 28

WILLIAMSON/SODUS (SDC)

RNP APCH - GPS.


Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct GOYER and hold.

AWOS-3
124.2

ROCHESTER APP CON
119.55 269.6

UNICOM
122.8 (CTAF) 0

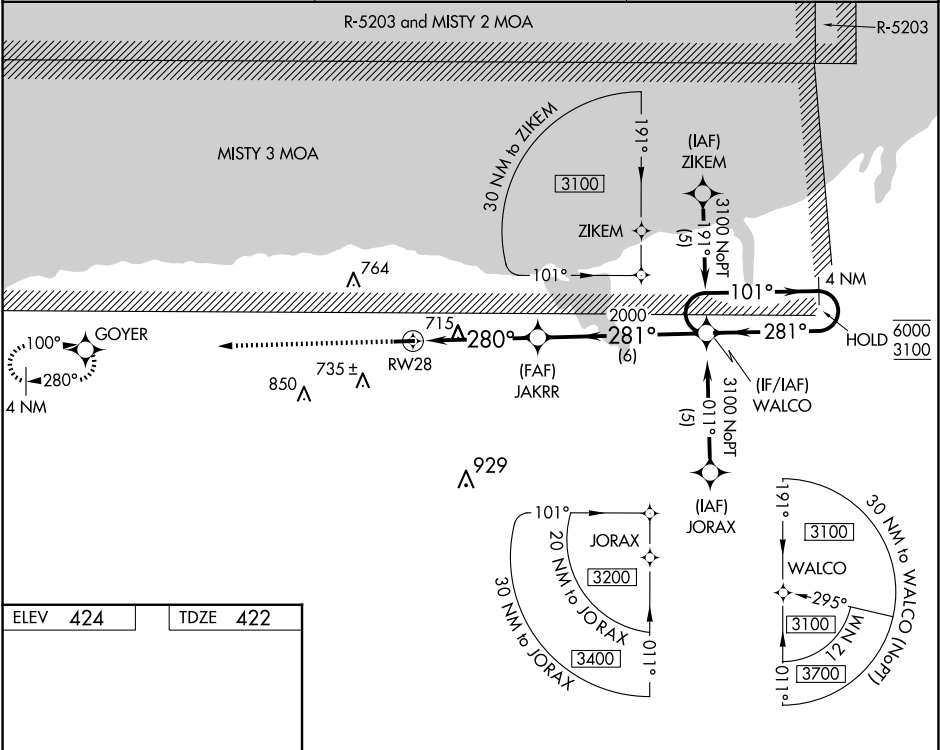

ELEV 424

TDZE 422

3000 GOYER

280°

10

3803 X 60

28

3000

GOYER

280°

2000

JAKRR

WALCO

4 NM Holding Pattern

101°

281°

6000

3100

CATEGORY	A	B	C	D
LNAV MDA	980-1	558 (600-1)	980-1½ 558 (600-1½)	NA
CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA