

WAAS
CH **45732**
W35A

APP CRS
346°

Rwy Idg
TDZE
Apt Elev

4010
1522
1523

RNAV (GPS) RWY 35

LANGLADE COUNTY (AIG)


RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C .


▲ Baro-VNAV and VDP NA when using AUW altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use AUW altimeter setting and increase LPV DA to 1877 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2124 feet and all visibilities ⅓ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 3400 direct
OZOOXY and hold.

AWOS-3 119.075	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

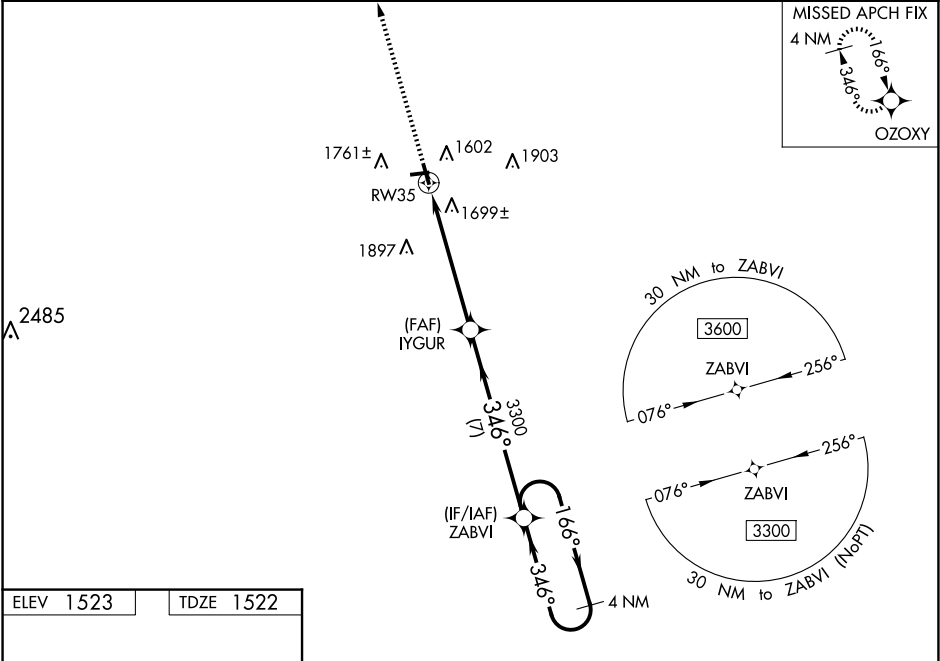

ELEV 1523	TDZE 1522
-----------	-----------

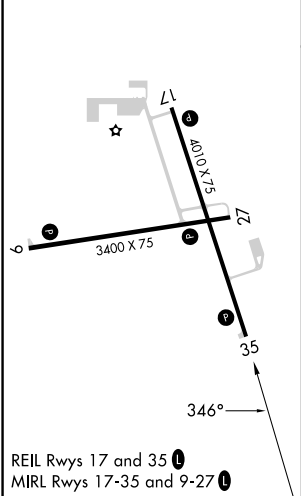

3400	OZOOXY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).		4 NM Holding Pattern
1.3 NM to RW35	IYUR 3300	ZABVI 3300	3300	GP 3.00° TCH 40
1.3	4.2 NM	7 NM		
CATEGORY	A	B	C	D
LPV DA	1772-1		250 (300-1)	
LNAV/VNAV DA	2019-1¾		497 (500-1¾)	
LNAV MDA	1960-1	438 (500-1)	1960-1¼	438 (500-1¼)
CIRCLING	2120-1	597 (600-1)	2260-2 737 (800-2)	2260-2¼ 737 (800-2¼)

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025