

WAAS CH 40238 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	3641 708 708
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27


ARENS FLD (RWN)

Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cts visibility 1/8 mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA.

NA

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3 135.775	SOUTH BEND APP CON ★ 132.05 257.8	UNICOM 122.8 (CTAF) 0
------------------------------	---	---------------------------------

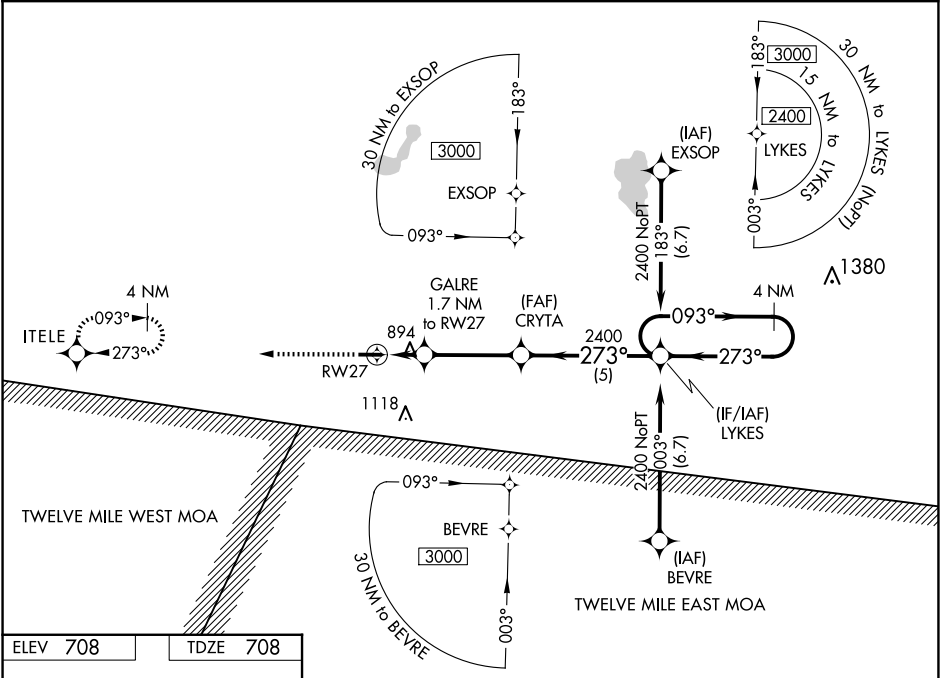

ELEV 708

TDZE 708

MIRL Rwy 9-27 0

REIL Rws 9 and 27 0

4201 X 75

273°

2400	ITELE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).				4 NM Holding Pattern
*LNAV only.		CRYTA	LYKES			
	GALRE 1.7 NM to RW27	2400	273°	093°	2400	
	RW27	*1280	2400	273°		GP 3.00° TCH 45
	1.7 NM	3.5 NM	5 NM			
CATEGORY	A	B	C	D		
LPV DA	995-1	287 (300-1)		NA		
LNAV/VNAV DA	1224-1¾	516 (600-1¾)		NA		
LNAV MDA	1200-1	492 (500-1)	1200-1¾ 492 (500-1¾)	NA		
CIRCLING	1240-1	532 (600-1)	1480-2¼ 772 (800-2¼)	NA		