

WAAS CH 78428 W08A	APP CRS 080°	Rwy Idg TDZE Apt Elev	4601 831 836
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 8

BLACK RIVER FALLS AREA (BCK)

Baro-VNAV NA when using La Crosse altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38° C (100°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA with La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting: increase LPV DA to 1172 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1441 feet and visibility all Cats ½ SM; increase all MDA 100 feet and visibility LNAV Cat B ¼ SM, Cat C and D ½ SM and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3500 direct
ZELED and hold.

AWOS-3PT 119.125	MINNEAPOLIS CENTER 128.6 363.0	CTAF 122.9 0
----------------------------	--	------------------------

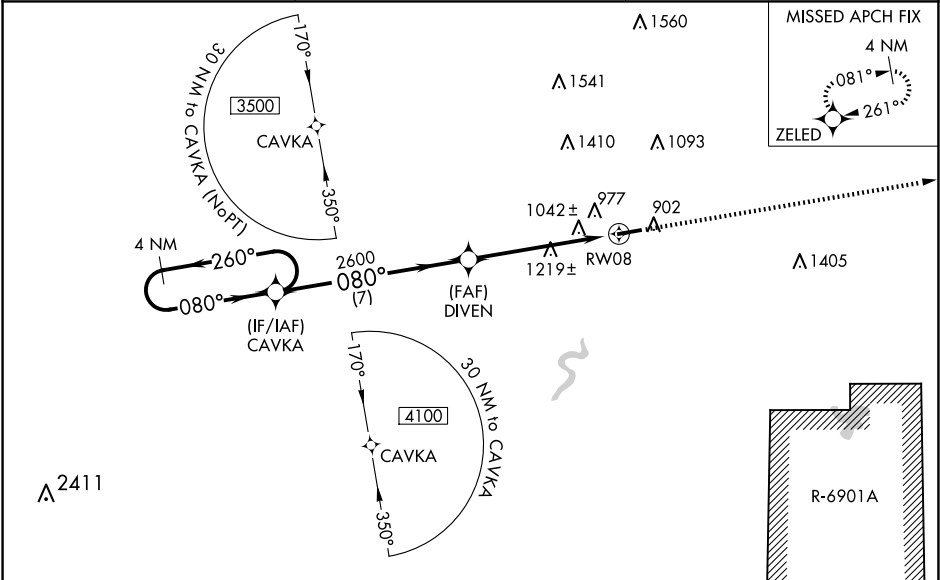

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).

3500 ZELED

*LNAV only.

CAVKA

DIVEN

RWY 8

GP 3.00° TCH 40

2600

7 NM

3.5 NM

2.0 NM

080° to RWY 8

0.3% UP

4601 X 75

CATEGORY	A	B	C	D
LPV DA	1081-7/8 250 (300-7/8)			
LNAV/VNAV DA	1350-13/4 519 (600-13/4)			
LNAV MDA	1480-1 649 (700-1)		1480-17/8 649 (700-17/8)	
CIRCLING	1480-1 644 (700-1)		1520-2 684 (700-2) 1760-3 924 (1000-3)	

REIL Rwy 8 and 26 0
MIRL Rwy 8-26 0