


WAAS CH 97533 W19A	APP CRS 193°	Rwy Ldg TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 19


KEWANEE MUNI (EZI)

RNP APCH - GPS.	Baro-VNAV NA. Use Galesburg altimeter setting. When local altimeter setting not received, use Moline altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$.	MISSED APPROACH: Climb to 2400 direct JUBDI and hold.
-----------------	--	--

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

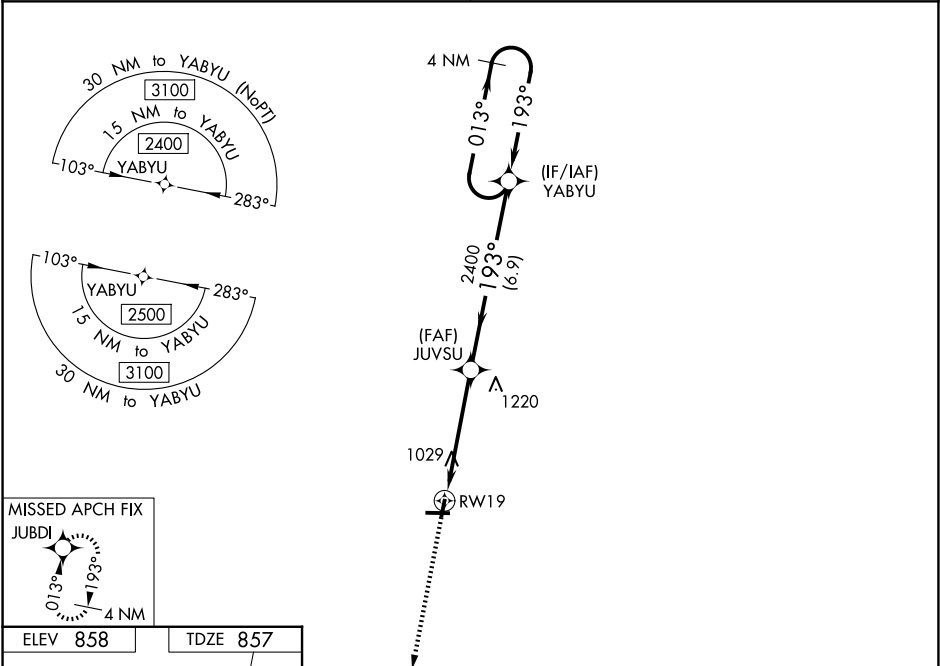

ELEV 858	TDZE 857
-----------------	-----------------

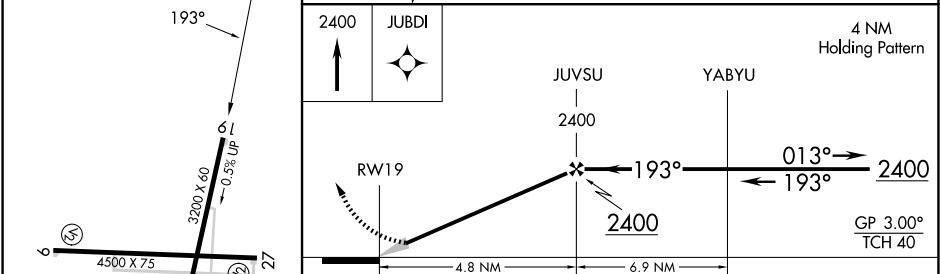

CATEGORY	A	B	C	D
LPV DA	1182-1	325 (400-1)		NA
LNAV/VNAV DA	1416-1 $\frac{5}{8}$	559 (600-1 $\frac{1}{2}$)		NA
LNAV MDA	1400-1	543 (600-1)	1400-1 $\frac{5}{8}$ 543 (600-1 $\frac{1}{2}$)	NA
CIRCLING	1400-1 542 (600-1)	1520-1 662 (700-1)	1520-1 $\frac{3}{4}$ 662 (700-1 $\frac{3}{4}$)	NA