


VORTAC FBC	APP CRS	Rwy Idg	N/A
108.2	104°	TDZE	N/A
Chan 19		Apt Elev	830

VOR-A

WYANDOT COUNTY (56D)

Procedure NA at night. When local altimeter setting not received, use Marion altimeter setting: increase all MDAs 40 feet and visibility Cat C/D ¼ SM. NA	MISSED APPROACH: Climbing left turn to 2500 on FBC VORTAC R-104 to RITRO INT/15 DME and hold.
---	---

FDY ASOS	CLEVELAND APP CON ★	UNICOM
132.85	128.35 360.65	123.05 (CTAF) 0

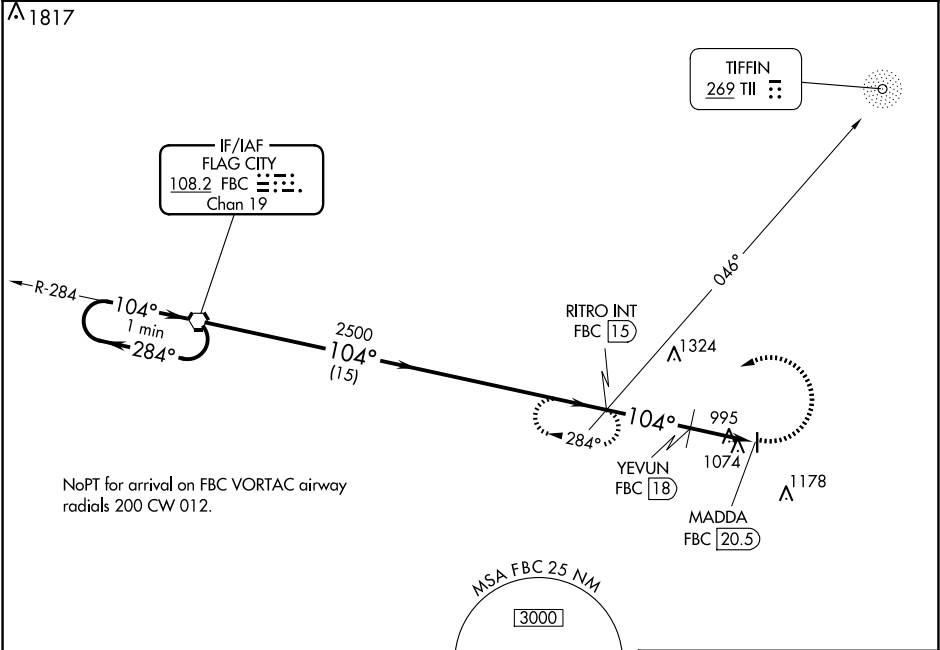

ADF or DME REQUIRED

ELEV 830

81

36

3697 X 75

104°

2500 FBC R-104

RITRO INT

One Minute Holding Pattern					2500 FBC R-104		RITRO INT		104°		3997 X 75	
2500 ← 284° 104° → FBC VORTAC RITRO INT FBC 15 2500 104° YEVUN FBC 18 MADDA FBC 20.5 1520 15 NM 3 NM 2.5												
CATEGORY		A		B		C		D				
CIRCLING		1520-1 690 (700-1)		1520-1¼ 690 (700-1¼)		1540-2 710 (800-2)		1540-2¼ 710 (800-2¼)		URL Rwy 18-36 0		
YEVUN FIX MINIMUMS (DME REQUIRED)												
CIRCLING		1420-1 590 (600-1)		1440-1 610 (700-1)		1540-2 710 (800-2)		1540-2¼ 710 (800-2¼)		FAF to MAP 5.5 NM		
Knots		60		90		120		150		180		
Min:Sec		5:30		3:40		2:45		2:12		1:50		